




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04J</b>		<b>A2</b>	(11) International Publication Number: <b>WO 98/31116</b>
			(43) International Publication Date: 16 July 1998 (16.07.98)
(21) International Application Number: PCT/US97/22850 (22) International Filing Date: 4 December 1997 (04.12.97) (30) Priority Data: 60/034,490           13 January 1997 (13.01.97)   US 08/984,427           3 December 1997 (03.12.97)   US (71) Applicant: DIVA SYSTEMS CORPORATION [US/US]; Building 203, 333 Ravenswood Avenue, Menlo Park, CA 94025 (US). (72) Inventors: GORDON, Donald; 216 Locust Street, Pacific Grove, CA 93950 (US). GOODE, Christopher; 722 Creek Drive, Menlo Park, CA 94025 (US). THOMAS, Philip, A.; 1410 Cedarmeadow Court, San Jose, CA 95131 (US). CONOVER, Mark, D.; 10721 Wunderlich Drive, Cupertino, CA 95014 (US). COLE, Brooks; 65 Third Street, Point Reyes Station, CA 94956 (US). (74) Agent: TONG, Kin-Wah; Thomason & Moser, 2-40 Bridge Avenue, P.O. Box 8160, Red Bank, NJ 07701 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: METHOD AND APPARATUS FOR PROVIDING A MENU STRUCTURE FOR AN INTERACTIVE INFORMATION DISTRIBUTION SYSTEM

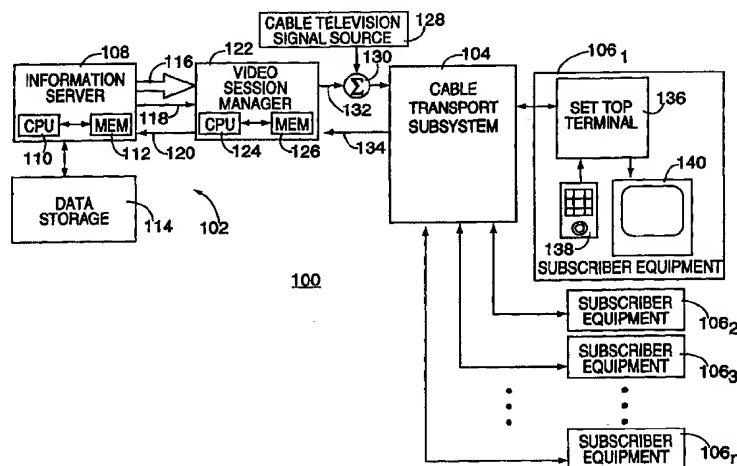

## (57) Abstract

A method and apparatus for providing an interactive menu structure within an interactive information distribution system. The menu structure is embodied in a combination of software, which provides a so-called navigator and a set top terminal that provides certain functionality for the navigator and a video session manager which provides support functionality for the set top terminal. The menu structure has each menu (e.g., menu instructions, graphics and video) contained in downloadable applets which are sent upon request from the service provider equipment to the set top terminal for display. As such, the navigator functions are actually distributed between the service provider equipment and the subscriber's equipment. Such distribution provides an enjoyable, real-time interactive session that allows the user to rapidly navigate through a plethora of menus to find particular information which they desire to view.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**METHOD AND APPARATUS FOR PROVIDING A MENU STRUCTURE  
FOR AN INTERACTIVE INFORMATION DISTRIBUTION SYSTEM**

This application claims benefit of U.S. provisional  
5 patent application serial number 60/034,490, filed January  
13, 1997, and U.S. Patent Application filed December 3,  
1997, Attorney Docket 533/006 the disclosure of which is  
herein incorporated by reference.

10 BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an interactive  
15 information distribution system such as a video-on-demand  
(VOD) system. More particularly, the present invention  
relates to a method and apparatus for providing an  
interactive menu structure, i.e., an on-screen program  
guide, for such an interactive information distribution  
20 system.

2. Description of the Background Art

Recent advances in digital signal processing  
25 techniques, and in particular, improvements in digital  
compression techniques, have led to a plethora of proposals  
for providing new digital services to a customer's home via  
existing telephone and coaxial cable networks. For example,  
it has been proposed to provide hundreds of cable television  
30 channels to subscribers by compressing digital data, digital  
video, transmitting compressed digital video over  
conventional coaxial cable television channels, and then  
decompressing the video in the subscriber's set top  
terminal. Another proposed application for this technology  
35 is a video-on-demand system in which a subscriber  
communicates directly with a video service provider via  
telephone lines to request a video program from a video  
library and the requested video program is routed to the  
subscriber's home via telephone lines or via coaxial cable

television cables for immediate viewing. Other proposed video-on-demand systems use a frequency multiplexing technique to enable control information for a set top terminal to be transmitted through a cable network back to an information server. Such a system permits bi-directional communication over a single network.

In each of these information distribution systems, menus are displayed upon the subscriber's television and using a remote control device, a subscriber selects a desired program for viewing. A program code is then sent from the set top terminal through the communication system back to the service provider. The selected program is then recalled from memory by the service provider equipment and broadcast to the set top terminal that requested that information. Alternatively, the subscriber may telephone the service provider and request certain information that is displayed in a menu upon the subscriber's television or the subscriber's set top terminal or television set may automatically tune, in response to the menu selection, to a broadcast channel to receive information transmitted on that channel. In any event, the currently available systems generally do not provide an interactive menu structure through which to select programming. Usually the menus are rudimentary text listings of available programs. By scrolling through the lists of programs using a remote control device the user selects desired programming. These text-based menus do not contain any graphics, video, or other material that would provide an entertaining interactive session. Two such systems are disclosed in U.S. patents 5,357,276 issued October 18, 1994 and 5,477,262 issued December 19, 1995.

Therefore, there is a need in the art for a method and apparatus for providing an improved interactive menu structure for an interactive information distribution system.

SUMMARY OF THE INVENTION

The disadvantages heretofore associated with the prior art are overcome by the present invention of a method and apparatus for providing an improved interactive menu structure for an on-screen program guide within an interactive information distribution system. The invention is embodied in a combination of software, which provides a so-called "navigator," and hardware, including a set top terminal that provides certain functionality for the navigator and a video session manager which supports the functionality of the set top terminal. As such, the navigator functions are distributed between service provider equipment (video session manager) and subscriber equipment (set top terminal). Such distribution provides an enjoyable, real-time interactive session that allows the subscriber to rapidly navigate through a plethora of menus to find particular information which the subscriber desires to view.

More specifically, the interactive information distribution system comprises service provider equipment connected to subscriber equipment through a communications network. The service provider equipment includes an information server coupled to a video session manager. The video session manager contains a modulator for modulating information provided by the server into a form that can be transmitted through the network to the subscriber equipment. The video session manager also contains a modem for communicating command and control information between the service provider equipment and subscriber equipment.

The subscriber equipment includes a set top terminal that is connected to a display device such as a television and an input device such as an infrared (IR) or radio-frequency (RF) remote control. The user while viewing the display device may select a number of menus using the input device as the menus are presented from the set top terminal upon the television screen. Any commands which the

user transmits to the set top terminal that are not handled by the set top terminal itself are communicated through the network to the service provider equipment, demodulated by the modem and implemented by the video session manager. The video session manager forms an interface between the modem and the server such that the video session manager may coordinate billing, ensure that proper programming is sent through the network and addressed properly to the set top terminal requesting that programming, and interact with the server.

A navigator menu structure is a series of interconnected "applets" (e.g., a linked list of programs). Each applet contains certain data for producing interactive menu imagery (screen) as well as control instructions that provide functionality for the menu. The applet data generally contains two components. There are the underlying video images (background video) which provides so-called entertaining "eye candy" and selectable icons for the viewer. Additionally, there is an overlay screen which provides the interactive functionality and command structure for the navigator. The overlay screen is produced using the on-screen display (OSD) functions of a video decoder within the set top terminal. Particular applets are sent through the network to the set top terminal in response to a particular command from the subscriber.

Specifically, when a subscriber selects a functional icon within a given menu, an applet for a new menu corresponding to the selected icon is downloaded from the server through the modem and the network to the set top terminal. The applet is contained in a compressed, packetized video stream. This stream conforms to the compression and transport protocols of a standard video transmission protocol such as the Moving Pictures Experts Group (MPEG) protocol.

As soon as the background video associated with the applet is available for display, the video decoder displays the video on the television screen. Additionally, the OSD overlay(s) are displayed "over" the background video. These

OSD graphics facilitate certain interactive functions such that when the user manipulates a joystick or other selection instrument particular regions are visibly altered, e.g., the regions become highlighted. The user then selects a  
5 highlighted region for implementation of a function represented by the highlighted region. The region generally changes in some manner indicating that that graphic has been selected. The display of the overlays is handled by a microprocessor within the set top terminal as well as an on-  
10 screen display graphics processor within the video decoder of the set top terminal. Selecting a region or icon on the screen will send a command to the video session manager for implementation. In response, the video session manager sends a new applet representing another menu (e.g., the next  
15 applet in the linked list) or a multimedia selection such as a movie.

The navigator menu structure may be conveniently described in terms of a video layer, a graphics layer and a control layer. The video layer comprises the displayed  
20 video images produced using, e.g., information contained in an applet. The graphics layer comprises OSD overlay(s) including graphical objects which are associated with applets stored in either subscriber or provider equipment. The OSD overlay(s) are displayed over the video layer. As  
25 such, the OSD layer can be used to emphasize and de-emphasize the underlying video. In particular, the graphics can be transparent (or have some level of transparency) to allow much of the underlying video to be seen while positioning certain graphics upon the video, and/or the OSD  
30 graphics can be opaque such that, by turning the graphics on and off the underlying video is either masked or revealed. The control layer comprises a command processing and logical operations layer. The control layer retrieves the applets associated with graphic layer objects selected by a user,  
35 executes the applets, provides video information to the video layer and objects information to the graphics layer.

BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts a high level block diagram of an interactive information distribution system containing the present invention;

FIG. 2 depicts a block diagram of an illustrative set top terminal within the system of FIG. 1;

FIG. 3 depicts an illustrative "compass" menu display;

FIG. 4 depicts a second illustrative "list" menu display containing a text list of selections;

FIG. 5 depicts a schematic illustration of the content of an applet;

FIG. 6 depicts the appropriate alignment of FIGS. 6A and 6B;

FIGS. 6A and 6B, taken together, depict a flow diagram of an applet transmission and execution routine;

FIG. 7 depicts a flow diagram of list information processing routine;

FIG. 8 depicts a flow process for retrieving and transmitting an applet;

FIG. 9 depicts a help menu;

FIG. 10 depicts a "compass" menu;

FIG. 11 depicts a movie information screen;

FIG. 12 depicts preview screen;

FIG. 13 depicts a guarantee screen;

FIG. 14 depicts a set up screen;

FIG. 15 depicts a set up menu;

FIG. 16 depicts a account summary;

FIG. 17 depicts a active programs screen;

FIG. 18 depicts a TV set up menu; and

FIG. 19 depicts a list menu.

To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.



DETAILED DESCRIPTION

The invention is a method and apparatus that provides an improved interactive menu structure for an on-screen  
5 program guide for use with an information distribution system. The inventive menu structure shall hereinafter be referred to as a "navigator". Although the navigator of the present invention can be implemented and executed using a number of different types of information distribution  
10 system, the preferred embodiment is used in combination with the hardware described below. The interactive information distribution system described below is disclosed in detail in United States provisional patent application 60/034,489 filed January 13, 1997 and incorporated herein by reference.  
15 However, this specific hardware arrangement is considered illustrative of the type of system with which the invention is used. Any other hardware arrangement that facilitates information distribution is considered within the scope of the invention.

20 FIG. 1 depicts a high level block diagram of the illustrative information distribution system 100 that incorporates the present invention. The system contains service provider equipment 102, a communications network 104 and subscriber equipment 106<sub>n</sub>, where n is an integer greater  
25 than zero. The service provider equipment 102 contains an information server 108 which is typically a parallel processing computer containing at least one central processing unit 110 and associated memory 112. The server interacts with a data storage device 114 (e.g., a disk drive  
30 array) that generally stores the subscriber information (e.g., video data) that will be recalled and downloaded to the subscriber. Additionally, within the service provider equipment is a video session manager 122 that provides session control of the information flowing to and from the  
35 server. Furthermore, the video session manager 122 contains its own central processing unit 124 and associated memory 126.

The information server 108 is coupled to the video session manager via data path 116, synchronization clock path 118 and control path 120. The server 108 provides data streams on path 116 and a synchronization clock on path 118  
5 in response to requests for information from the video session manager on path 120. These data streams are packetized and modulated onto a carrier that is compatible with the transmission requirements of the network 104.

The video session manager 122 accomplishes all of the  
10 transmission interface requirements of the system 100. Specifically, the video session manager 122 is coupled to subscriber equipment via a forward information channel 132, a forward command channel 133 and a back channel 134. All three of these channels are supported by the cable transport  
15 network. The video session manager contains a modulator for modulating the server data streams onto one or more carrier frequencies for transmission on the forward information channel. Additionally, the video session manager contains a modem for sending control information via the forward  
20 command channel and receiving control information via the back channel. Moreover, a conventional cable television signal source 128 is optionally coupled to the forward information channel via a signal coupler 130.

The network 104 can be any one of a number of  
25 conventional broadband communications networks that are available such as a fiber optic network, a telephone network, existing cable television network and the like. For example, if the network is a hybrid fiber-coax network, the transmission transport technique used in both forward  
30 channels may be modeled after the Moving Pictures Expert Group (MPEG) transport protocol for the transmission of video data streams. In general, the transport mechanism for both of the forward channels that transport information to the set top terminal must be able to carry unidirectional,  
35 asynchronous packetized data such as that defined in the MPEG video and audio signal transmission protocol, and the like. There are a number of such transport protocols available.

Each set top terminal 106 receives the data streams from the forward information channel, demodulates those streams and processes them for display on the display device 140 (e.g., a conventional television). In addition, the set top terminal 106 accepts commands from a remote control input device 138 or other input device. These commands are formatted, compressed, modulated, and transmitted through the network 104 to the video session manager 122. Typically, this transmission is accomplished through the back channel 134. These commands are preferably transmitted through the same network used to transmit information to the set top terminal. However, the back channel coupling the set top terminal to the server may be a separate network, e.g., a forward information channel through a television cable network and a back channel through a telephone network. The telephone network could also support the forward control channel. The video session manager 122 interprets each command sent from the set top terminal through the back channel and instructs the information server to perform certain functions to implement the subscriber request.

FIG. 2 depicts a block diagram of the set top terminal 136 which contains a transceiver 200, a central processing unit (CPU) 212 and a display driver 222. Of course, the functionality of the set top terminal 136 can be embedded within a single consumer electronics product such a television. As such, the description of a stand-alone set top terminal should be considered illustrative of the type of subscriber equipment that may be used to implement the present invention. Within the set top terminal 136, the CPU 212 is supported by random access memory (RAM) 220, read only memory (ROM) 218 and various support circuits 216 such as clocks, power supply, an infrared receiver and the like. The transceiver 200 contains a diplexer 202, a back channel transmitter 208, an information channel receiver 204, a command channel receiver 210, an information decoder 206, a conventional television signal receiver 224, and a multiplexer 226. The diplexer 202 couples the three

channels carried by a single cable within the network to the transmitter and receivers.

Each receiver 204 and 210 contains a tuner, amplifiers, filters, a demodulator, and a depacketizer. As such, the  
5 receivers tune, downconvert, and depacketize the signals from the cable network in a conventional manner. The information channel receiver 204 contains a conventional QAM demodulator such as a model BCM3115 manufactured by the Broadcom Corporation. Other such demodulators are well-  
10 known in the communications arts and could be used in this application. However, this particular QAM demodulator also contains a built in "out-of-band" QPSK demodulator for handling command channel data carried by the forward command channel. As such, a single integrated circuit demodulates  
15 both subscriber requested information (audio and video) as well as command data.

The decoder 206 processes the data packets carrying subscriber requested information produced by the QAM demodulator into useable signals for the end user display,  
20 e.g., television, home studio, video recorder and the like. The decoder is coupled to a dynamic random access memory (DRAM) to facilitate decoding of the data packets and processing of applets, as shall be discussed below. The signals for display are conventionally processed by a  
25 display driver 222 to produce composite video as well as a conventional television signal, e.g., modulated onto channel 3 or 4 using the NTSC standard modulation.

The conventional cable television signal receiver 224 contains a tuner and an analog (NTSC) demodulator. A  
30 multiplexer 226 couples the demodulated analog or decoded video signal to the display drive 222. Of course, the NTSC demodulator can be replaced with a PAL or SECAM standard demodulator, as needed.

The demodulated QPSK signal provides command and  
35 control information to the CPU 212 for generating certain graphics and control interface regions upon a television screen. The CPU is, for example, a Model 68302 processor manufactured by Motorola. This processor, operating in

-11-

combination with the decoder 206 as well as a continuously available video signal from the information channel, produces screen displayed buttons, icons and graphical regions with which a subscriber interacts using the remote control. Without the video signal the set top terminal does not produce any display, i.e., the displays are actively generated in real time as needed to facilitate certain navigation functions.

Specifically, a joystick on the remote control selectively highlights certain pre-defined regions of the television screen. To perform such highlighting, a reference region is always highlighted when a menu is first displayed. From that reference region, direction vectors produced by the joystick are interpreted by the CPU to highlight a region lying in the direction in which the joystick was moved. When a desired selectable icon is highlighted, the subscriber depresses a "select" key on the remote that sends an infrared signal to an infrared receiver (a support circuit 216). This receiver sends the select command to the CPU for interpretation. The selected region is associated with a function. If the function is a request for specific information or a change in the menu, the processor formats the command and sends it to the back channel transmitter for transmission to the video session manager. If the command is a function that is handled locally such as volume control, the CPU implements the function within the set top terminal.

Since the session control commands are implemented by the video session manager and not the set top terminal alone, the number of available session control commands is infinite. Each command is implemented by the execution of an applet, as described below. The applets control both information sessions, e.g., the presentation of video to the television screen, and navigator functions, e.g., the menus that facilitate selection of a video program. As such, particular commands include, but are not limited to, information or menu navigation commands, movie start at beginning, movie start at the middle, play, stop, rewind,

forward, pause, and the like. These presentation and navigation control commands are sent via a back channel transmitter 208 using binary phase shift key (BPSK) modulation. Additionally, the CPU in the set top terminal  
5 implements certain local commands such as increment or decrement the volume, channel change, and on/off.

The invention is implemented as one or more interrelated "applets" which, when taken together, form the navigator of the present invention. The applets are  
10 transmitted, for the most part, to the set top terminal via the forward information channel. Certain information used by particular applets is transmitted to the set top terminal via a data stream propagated through the forward command channel. As such, the data stream carrying the applet is  
15 demodulated, the applet extracted and the applet's information decoded prior to execution that displays a menu on the display device. The detailed process by which an applet is downloaded and used to produce a menu is disclosed with respect to FIGS. 6 and 7 below.

20 FIG. 3 and 10 depict illustrative menu imagery (a "compass" menu screen 300) used to select movies available from the information distribution system. All the information, as well as control instructions, to produce such a menu is contained in an applet downloaded from the  
25 service provider equipment. As such, the service provider equipment stores the applets in server memory such that each applet can be rapidly recalled and routed to a set top terminal for display.

The illustrated menu screen 300 contains background  
30 video 302 that contains the menu structure. The background video also produces the text and other fixed graphics, e.g., the compass 304. An overlay or foreground video of typically transparent on-screen display (OSD) bitmap graphics 306 (shown in phantom proximate each user  
35 selectable graphic or icon) is positioned atop the background video 302. Typically, one region of the foreground video is highlighted to identify the present selectable menu region or icon. As shall be described

below, these OSD graphics are produced and controlled by the OSD graphics processor within the video decoder in the set top terminal.

The background video comprises a video layer, while the overlay or foreground video comprises a graphics layer. The generation of both the video layer and graphics layer is controlled by a control layer. Briefly, the video layer comprises displayed video images produced using, e.g., information contained in an applet. The graphics layer comprises OSD overlay(s) including graphical objects that are associated with applets stored in either subscriber or provider equipment. The OSD overlay(s) are displayed over the video layer. The control layer comprises a command processing and logical operations layer. The control layer retrieves the applets associated with graphic layer objects selected by a user, executes the applets, and provides video information to the video layer and object information to the graphics layer.

The applet may also carry audio information that would "play" when a particular event occurred or specific menu object selected. Additionally, an animation object could be carried in the applet to allow certain objects to become animated when selected.

Generally, when a user selects a particular icon, the graphic object in the overlay plane is altered to de-emphasize or emphasize the icon or the video underlying the graphic object. In other words, the object is altered from one state to another state to facilitate the emphasis/de-emphasis of a particular region of the menu.

In one embodiment of the invention, when a user selects a highlighted icon, the OSD graphic proximate that icon is immediately altered to acknowledge the selection. The alteration is typically a change of color of the transparent overlay such that the icon "glows". To effectuate this OSD alteration, each menu field represented by the region is defined by a pair of linked lists. One pair of linked lists in the menu is always active, i.e., there is always some region of the screen that is highlighted.

Alternatively, the OSD graphics may produce an opaque overlay that is made transparent (or partially transparent) when the region containing the overlay, or some other region, is selected. As such, the underlying video that  
5 lies beneath the overlay is revealed. Such a mask and reveal process enables the video to contain regions of imagery that are revealed upon selection, where these regions provide the user with recognizable and enjoyable information generally relating to the selection that was  
10 made or generally providing an enjoyable transition to the next screen. Furthermore, the mask and reveal process can be used to periodically mask and reveal certain imagery without the subscriber selecting any regions. This function may be used to merely provide a graphical enhancement to the  
15 display, i.e., emphasis and de-emphasis of particular menu regions.

The applet logic responds to the user commands entered through the remote control by activating different linked lists (i.e., moving a starting link pointer), or by adding,  
20 removing, or changing the mix of regions in the active list. The applet logic also tells the CPU which command sequence terminates the applet and which response to send to the video session manager. The applet logic contains a table of command sequences that are identified with specific  
25 coordinates defining the field locations on the menu.

The function of the navigator is generated through the use of Navigator descriptor files. These files are used as the basis for construction of all navigator applet screens. A navigator descriptor file defines specific objects (e.g.,  
30 graphical bitmap, audio, animation and the like) to be used, their physical location on the navigator menu screen, and their interactions with the subscriber's remote control actions. The navigator asset builder software program uses the navigator descriptor files to generate the final pseudo  
35 MPEG bitstream that is sent to the set top terminal. The asset builder reads the objects as defined by the navigator asset builder and combines them with the appropriate control



information also contained in the navigator descriptor files.

The navigator descriptor files are written in an HTML like language syntax specifically designed for this application. Each definition type starts with an angle bracket "<" immediately preceding the definition name. The definition type ends with an angle bracket, a forward slash "</" and then the definition name. Definitions can be nested. The navigator description file for building an applet having bitmap objects includes the following type definitions:

- 15       REGION: Lists all of the bitmaps that reside within an individual region on the screen, their specific locations within the region, and palette specific information for each bitmap.
- PALETTE: Defines a palette of one or more colors.
- 20       BUTTON: Defines a control that appears as one or more previously defined bitmaps on the subscriber's television and can cause actions to take place (primarily messages sent upstream) when the subscriber presses the SELECT button on the remote control while the button is highlighted.
- 25       LIST: Defines a control that consists of one or more bitmaps (usually a rectangular region of constant color) that is overwritten with TEXT sent from the upstream process and rasterized onto the region. Generally the text remains visible and the background colors change per subscriber selection.
- 30       STATIC: Defines a control that consists of one bitmap (usually a rectangular region of constant color) into which upstream text is rasterized and made visible no matter what the subscriber selects with the remote control.
- 35       EDIT: Defines a control that consists of one bitmap (usually a rectangular region of constant

-16-

color) into which user entered text (as in numbers from the remote control are rasterized. The text generally remains visible for that entire applet. The background color changes as the subscriber selects or unselects the edit region. Edit controls also can exhibit the behavior that require a predefined number of characters to be entered by the subscriber through the remote control before any other buttons or controls can be actuated.

ACTION: Messages that are formatted and sent upstream via the back channel when the subscriber presses the SELECT button while the corresponding ACTION control is highlighted.

For example, a Navigator Descriptor File for a List Screen (LAZ) such as that which appears in FIG. 19 and whose operation is discussed with respect to FIG. 7 is structured as follows:

```
<SCREEN name=LAZ>

##### Define Regions
#####
25 <REGION MIX=3>
    <BMP NAME=UpLevelInfo FILE=/ms/bmp/up_mme~2
    X=88 Y=398 BG=0>
    </REGION>
    <BMP NAME=UpInfo FILE=/ms/bmp/listup~2 X=88
30 Y=398 BG=0>
    </REGION>
    <REGION MIX =3>
    <BMP NAME=Chop FILE=/dv/chopstr X=555 Y=394
    BG=14>
35 <BMP NAME=ChopInfo FILE=/ms/bmp/chop_m~2 X=88
    Y=398 BG=0>
    </REGION>
    </REGION MIX=2>
    <BMP NAME=Up FILE=/ms/bmp/list~1 X=287 Y=166
40 BG=0>
    <BMP NAME=line1 FILE=dv/line X=163 Y=205
    BG=1>
    <BMP NAME=line2 FILE=/dv/line X=163 Y=236
    BG=1>
45 <BMP NAME=line3 FILE=/dv/line X=163 Y=267
    BG=1>
    </REGION>
```

```

</REGION MIX=2>
    <BMP NAME=line4 FILE=/dv/line X=163 Y=298
    BG=1>
</REGION>
5  </REGION MIX=2>
    <BMP NAME=line5 FILE=/dv/line X=163 Y=329
    BG=1>
    <BMP NAME=line6 FILE=/dv/line X=163 Y=360
    BG=1>
10  <BMP NAME=ChopTop FILE=/dv/chopsttp X=555
    Y=355 BG=14>
    </REGION>
    <REGION>

15  <BMP NAME=AEInfor FILE=/ms/bmp/list_a~1 X=88
    Y=392 BG=0>
    </REGION>
    <REGION>
20  <BMP NAME=FJInfo FILE=/ms/bmp/list_f~1 X=88
    Y=392 BG=0>
    </REGION>
    <REGION>
25  <BMP NAME=KOInfo FILE=/ms/bmp/list_k~1 X=88
    Y=392 BG=0>
    </REGION>
    <REGION>
    <BMP NAME=PTInfo FILE=/ms/bmp/list_p~1 X=88
    Y=392 BG=0>
30  </REGION>
    <REGION>
    <BMP NAME=UZInfo FILE=/ms/bmp/list_u~2 X=88
    Y=392 BG=0>
    </REGION>
35  <REGION>
    <BMP NAME=Down FILE=/ms/bmp/list_d~12 X=286
    Y=388 BG=0>
    <BMP NAME=DownInfo FILE=/ms/bmp/list_d~2 X=88
    Y=392 BG=0>
40  </REGION>
    </REGION MIX=6>
    <BMP NAME=SAUSAGE FILE=/dv/sausage BG=14
    X=178 Y=53>
    <BMP NAME=AE FILE=/dv/ae BG=14 X=178 Y=53>
45  <BMP NAME=FJ FILE=/dv/fj BG=14 X=178 Y=53>
    <BMP NAME=KO FILE=/dv/ko BG=14 X=178 Y=53>
    <BMP NAME=PT FILE=/dv/pt BG=14 X=178 Y=53>
    <BMP NAME=UZ FILE=/dv/uz BG=14 X=178 Y=53>
    </REGION>
50  </REGION MIX=3>
    <BMP NAME=Help FILE=/ms/bmp/helpst~1 X=555
    Y=8 BG=2>
    </REGION>
    <REGION>
55  <BMP NAME=HelpInfo FILE=/ms/bmp/help_9~1 X=88
    Y=392 BG=0>
    </REGION>

```

```

5      <REGION>
          <BMP NAME=ListInfo FILE=/ms/bmp/list_t~1 X=88
            Y=398 BG=0>
        </REGION>
        <REGION>
          <BMP NAME=UpLevel FILE=/ms/bmp/up_mme~1 X=274
            Y=24 BG=0>

10      ##### Define Special Palettes #####

        <PALETTE NAME=off>
          <RGB 0 150 150 TRANSPARENT>
          <RGB 0 0 0>
        </PALETTE>
15      <PALETTE NAME=active>
          <RGB 0 255 179>
          <RGB 0 0 0>
        </PALETTE>
        <PALETTE NAME=BON>
20      <RGB 255 255 255 TRANSPARENT>
        </PALETTE>
        <PALETTE name=HighLite>
          <RGB 0 255 179>
          <RGB 0 0 0>
25      </PALETTE>

          ##### Define Controls #####

30      <LISTBOX NAME=listbox ON=active OFF=off SEL-LISTSEL
        FONT=0>
          <GOTO N=Up S=Down>
          <GOTO E=Chop>
          <TAB TYPE=CENTER STOP=188>
          <TAB TYPE=LEFT STOP=188>
35      <ENTRY ASC=line1>
          <ENTRY ASC=line2>
          <ENTRY ASC=line3>
          <ENTRY ASC=line4>
          <ENTRY ASC=line5>
40      <ENTRY ASC=line6>
          <FOCUS ASC=ListInfo ON=ListInfo>
          <ACTION MSG=SELECT>
            <FADE>
            <SENDSTRINGS LISTSEL>
45      </ACTION>
        </LISTBOX>
        <BUTTON NAME=DOWN>
          <FOCUS ASC=Down ON=Down>
          <FOCUS ASC=DownInfo ON=DownInfo>
50      <GOTO N=listbox E=Chop>
          <ACTION MSG=SELECT>
            <PGDOWN LIST=listbox>
          </ACTION>
        </BUTTON>
55      <BUTTON NAME=Up>
          <FOCUS ASC=Up ON=Up>
          <FOCUS ASC=UpInfo ON=UpInfo>

```

```

        <GOTO S=listbox N=KO>
        <ACTION MSG=SELECT>
            <PGUP LIST=listbox>
        </ACTION>
5    </BUTTON>
    <BUTTON NAME=UpLevel>
        <FOCUS ASC=UpLevel ON=UpLevel>
        <FOCUS ASC=UpLevelInfo ON=UpLevelInfo>
        <GOTO S=KO E=Help>
10    <ACTION MSG=SELECT>
            <FADE>
            <TRANSITION DIR=U>
        </ACTION>
    </BUTTON>
15    </BUTTON NAME=AE>
        <FOCUS ASC=SAUSAGE ON=BON>
        <FOCUS ASC=AE ON=HighLite>
        <FOCUS ASC=AEInfo ON=AEInfo>
        <GOTO S=Up E=FJ N=UpLevel>
20    <ACTION MSG=SELECT>
            <SENDSTRINGS AE>
        </ACTION>
    </BUTTON>
    <BUTTON NAME=FJ>
25    <FOCUS ASC=SAUSAGE ON=BON>
        <FOCUS ASC=FJ ON=HighLite>
        <FOCUS ASC=FJInfo ON=FJInfo>
        <GOTO S=Up E=KO W=AE N=UpLevel>
        <ACTION MSG=SELECT>
30    <SENDSTRINGS FJ>
        </ACTION>
    </BUTTON>
    <BUTTON NAME=KO>
35    <FOCUS ASC=SAUSAGE ON=BON>
        <FOCUS ASC=KO ON=HighLite>
        <FOCUS ASC=KOInfo ON=KOInfo>
        <GOTO S=Up E=PT W=FJ N=UpLevel>
        <ACTION MSG=SELECT>
40    <SENDSTRINGS KO>
        </ACTION>
    </BUTTON>
    <BUTTON NAME=PT>
        <FOCUS ASC=SAUSAGE ON=BON>
        <FOCUS ASC=PT ON=HighLite>
45    <FOCUS ASC=PTInfo ON=PTInfo>
        <GOTO S=Up E=UZ W=KO N=UpLevel>
        <ACTION MSG=SELECT>
            <SENDSTRINGS PT>
        </ACTION>
50    </BUTTON>
    <BUTTON NAME=UZ>
        <FOCUS ASC=SAUSAGE ON=BON>
        <FOCUS ASC=UZ ON=HighLite>
        <FOCUS ASC=UZInfo ON=UZInfo>
55    <GOTO S=Up W=PT E=Help N=UpLevel>
        <ACTION MSG=SELECT>
            <SENDSTRINGS UZ>
```

-20-

```

                </ACTION>
            </BUTTON>
            <BUTTON NAME=Help>
                <FOCUS ASC=Help ON=Help>
5              <FOCUS ASC=HelpInfo ON=HelpInfo>
                <GOTO W=UZ>
                <GOTO S=Chop>
                <ACTION MSG=SELECT>
                    <FADE>
10              <TRANSITION DST=HLS DIR=D>
                </ACTION>
            </BUTTON>
            <BUTTON NAME=Chop>
                <FOCUS Chop ASC=Chop ON=Chop>
15              <FOCUS ChopInfo ASC=ChopInfo ON=ChopInfo>
                <FOCUS ChopTop ASC=ChopTop ON=ChopTop>
                <GOTO W=Down>
                <GOTO N=Help>
                <ACTION MSG=SELECT>
20              <FADE>
                    <TRANSITION DST=MME DIR=J>
                </ACTION>
            </BUTTON>
        </SCREEN>
25

```

As shown in FIG. 8, an address (region ID) identifying the selected region is transmitted to the video session manager. The video session manager concatenates the region address with an address of the applet within which the region selection was made. The concatenated address is used to identify an entry (an applet ID) in an applet table. This applet ID indicates the applet that is to be sent to fulfill the subscriber's request. The AID may also identify a movie or other multimedia information that is to be transmitted. The specific applet routine identified by the applet ID is recalled from memory and forwarded to the set top terminal for execution. The set top terminal then performs a function identified by the applet, e.g., decode the signals with assets (applet decoding), decode signals without assets (decode applet without any controls except return), decode movie from beginning, or decode movie from middle. As such, the set top terminal does not perform any high level functions, the terminal, in most instances, merely functions as a video decoder and command interpreter.

Returning to FIG. 3 and 10, each menu is linked to other menus as a linked list such that selection of a

particular icon results in another applet being downloaded and another menu being generated. In addition to textual icons, the menu 300 contains a "compass" 304. This compass forms a "spatial mnemonic" through which a subscriber  
5 navigates through the various menu screens. For example, the east and west arrows (310 and 312) link to menus that are conceptually lateral to the present menu. Such menus that are lateral to, for example, the movie explorer menu 300 are new movie promotional clips and a special  
10 interest list menu. The north arrow 314 links to a previous menu. The south arrow is generally non-functional in the particular menu shown. Other icons on the menu 300 include a help icon 318 and a current highlighted region description area 320. As such, area 320 provides a short description of  
15 the presently highlighted region, e.g., the explanation of "Movies A-Z" is shown. Selecting region 324 executes an applet that produces a "list menu", as described with respect to FIG. 4 and 19 below. Other icons link to short multimedia "clips". For example, the "Coming Soon" icon 322  
20 links to a series of promotional clips or graphics that advertise movies that will soon be available. The "On Set" icon 316, when selected, leads back to the initial menu into the navigator or some other high level point in the navigator tree. The "On Set" icon appears on every menu to  
25 provide an direct link to a higher level of the navigator from any menu.

For example, selecting the "Movies A-Z" textual icon 324 links to an alphabetical menu (see menu 400 of FIG. 4 and 19) that presents an alphabetical list 402 of all the  
30 available movies. The arcuate menu region 404 contains a plurality of alphabetic ranged segments  $406_n$  (where  $n$  is an integer value) that, when selected, presents a menu list containing the movie titles in the selected alphabetic range. The subscriber can then scroll through the  
35 alphabetical list 402 using the up arrow icon 402 to move to a previous page of movies and the down arrow 408 to move to a following page. Manipulating the joystick will sequentially highlight the movie titles until a desired

title is highlighted. Selecting a name of a movie causes that movie to be sent to the set top terminal for presentation. The left and right arrows 410 and 412 move to similar lists in parallel menus, e.g., moving from an  
5 alphabetical list of comedies may move to an alphabetical list of dramas and so on. When an arrow (or any icon) is highlighted, a move identifier area 320 presents a short description of the menu that will be presented if that icon is selected.

10 Prior to completing a transaction for purchase of a movie or other service, other applets are downloaded to the set top terminal which form menus stating the price of the selection, confirming the selection, showing a preview prior to purchase, and the like.

15 An illustrative set of particular menus used by the system are shown in FIGS. 9-19. These menus include: a help menu (FIG. 9) containing a list of help topics; a compass menu (FIG. 10) as discussed above; a movie information screen (MIS) (FIG. 11) containing a movie abstract as well  
20 as a preview button, buy button, "on set" button and help button; a movie preview screen (FIG. 12) containing a region for a video preview to be played, arrow buttons to next/previous preview, buy button, information (MIS) button and on set button; guarantee screen (FIG. 13); set up menu  
25 (FIG. 14) containing fields for entering a rating limit, a spending limit and a PIN as well as a save button and an on set button; a list menu (FIG. 15) illustrating set up information; an account summary screen (FIG. 16); an session summary menu (FIG. 17) containing the active programs  
30 associated with present PIN; a TV set up menu (FIG. 18); an alphabetical listing menu (FIG. 19) as previously described. At the bottom of each of the screens depicted in FIGS. 13-18 is printed an example of the audio voice over (VO) that is reproduced as each screen is displayed.

35 FIG. 5 depicts a schematic diagram of the contents of the portion of an applet 500 that is transmitted via the information channel to implement each of the menus. Separately, the descriptor file is transmitted via the



command channel (or alternatively the information channel) such that the functions of the applet can be implemented. A descriptor file for each menu may be transmitted and stored (or prestored) in the set top terminal. Specifically, the  
5 applet 500 contains a leader 502, OSD overlay graphics 504, navigator control instructions 506, transition signal 508, and compressed (e.g., MPEG) background video 510. As such, upon selection of an icon in a given menu, an applet for the linked menu is transmitted from server to the set top  
10 terminal. That applet carries the background video and the OSD overlays as well as all instructions necessary to implement the functions of the menu. The video session manager maintains the linked list (menu tree) of applet interrelations such that when the set top terminal sends a  
15 command via the back channel, the video session manager interprets the command and causes the server to send the appropriate applet. The applet begins with the leader 502 which is followed by the OSD overlays 502 which are decoded by the OSD decoder while the remainder of the applet is  
20 being processed. The navigation control instructions 504 facilitate overlay activation and transition control. The transition signal is generally a packet that identifies the end of the navigator information and the beginning of the new MPEG video. Lastly, the new MPEG video signal is sent  
25 and presented in combination with the OSD graphics. At some point in the menu structure, the subscriber selects a movie title and the video session manager causes the server to send the selected movie.

FIG. 6 depicts the appropriate alignment of FIGS. 6A  
30 and 6B. These figures, taken together, depict an applet transmission and execution routine 600. The diagram depicts the portion of the routine handled by the CPU on the left and the portion of the routine handled by the OSD decoder on the right. The CPU primarily handles control layer  
35 functions, while the OSD decoder primarily handles graphics layer functions. The routine 600 begins with step 602 and proceeds to step 604. The CPU detects, at step 604, the type of transmission being received. Specifically, the CPU

detects whether the transmission is a movie or a navigator applet. An applet is identified by the video packet sequence containing a particular stream identification code, e.g., VIDEO ID 7. If the transmission is a movie, the video decoder begins, at step 606, decoding the movie. The movie decoding process is controlled by the CPU via step 656. At step 656, the CPU processes any movie presentation control commands generated by the remote control. As such, the CPU sends, at step 658, the presentation control command to the video session manager to facilitate changing the presentation. The routine ends at step 660.

If, at step 604, an applet is detected, the routine awaits, at step 608, for the applet leader. At step 610 and 612, the set top terminal CPU initializes the decoder and sets certain buffer pointers. In particular, the applet contains a video stream having VIDEO ID 7 carrying the OSD graphics, an audio stream having AUDIO ID 7 carrying the applet control instructions, and a video stream carrying the background video. To process these applet components, the CPU must store the OSD graphics and the instructions in special memory locations to avoid interference with the normal operation of the video decoder. As such, at steps 610 and 612, the CPU initializes the decoder's VIDEOID stream ID to 7 and sets the video stream select (VSS) bit. The OSD data is delimited by a user packet that indicates that the OSD data download is complete. Further, the CPU sets a video input buffer pointer to an OSD region of the decoder DRAM. As such, all video packets having an ID of 7 are routed to the OSD region of the memory. Similarly, the set top terminal CPU initializes the decoder AUDIOID stream ID to 7 and sets the audio stream select enable (ASE) bit. Also, the audio input buffer pointer is set to a temporary memory location of the decoder DRAM. This storage location is temporary because the instructions carried in the AUDIO ID 7 packets are ultimately copied to the CPU DRAM for execution.

At step 616, the routine queries whether an excessive amount of time has elapsed between detection of an applet

-25-

and reception of the applet. If the query is affirmatively answered, the set top terminal sends, at step 618, a negative acknowledgment (NAQ) signal through the back channel to the video session manager. The routine ends at  
5 step 620. Upon receiving the NAQ signal, the video session manager will resend the applet.

If the query at step 616 is negatively answered, the routine proceeds to step 622. At step 618, the set top terminal begins receiving the applet, i.e., the CPU detects  
10 the user data packet. At step 624, the routine queries whether an excessive amount of time has elapsed between detection of a user data packet and reception of the data. If the query is affirmatively answered, the set top terminal sends, at step 626, a negative acknowledgment (NAQ) signal  
15 through the back channel to the video session manager. The routine ends at step 628. Upon receiving the NAQ signal, the video session manager will resend the applet.

At step 630, the control instructions within packets carrying AUDIOID 7 are extracted from the packets and stored  
20 in the CPU DRAM. At step 632, forward error correction is performed on the extracted bits. Additionally, at step 634, a check sum is created to ensure that the extracted control instructions are correct. At step 636, the CPU queries whether the check sum was correct. If the check sum is  
25 correct, the routine proceeds to step 6342. However, if the query is negatively answered, the routine sends a NAQ to the video session manager and ends at step 640 to await retransmission of the applet.

At step 642, the OSD data within packets having a  
30 VIDEOID 7 are extracted from the packets and stored in the OSD region of the decoder DRAM. The payload of these packets is one or more bitmap images to be used by the applet. The OSD images are loaded directly into the start of the OSD data space. Subsequent packets (for VIDEOID 7)  
35 contain consecutive portions of the OSD image(s). An OSD image compiler leaves space at the beginning of each packet for actual MPEG synchronization codes. To indicate the end of the OSD transmission, a "user data" packet of up to 96

bytes in length is inserted into the video stream between the OSD packet stream and the background video stream.

At step 644, the CPU resets the video decoder to enable it to receive the background video transmission. At  
5 step 646, the video decoder begins to decode the background video and display that navigator imagery to the subscriber. The OSD overlays are also processed by the decoder and displayed in accordance with the descriptor file for the menu being displayed.

10 At step 648, the routine processes navigator commands from the remote control. These commands include all those associated with an applet with assets as well as an applet without assets. Note that an applet without assets has a single return button displayed for selection. Thus, the  
15 joystick is disabled, but the select function operates in the same manner as an applet with assets. At step 648, the CPU processes the three types of navigator commands: local set top terminal commands such as on/off, volume, channel selection; joystick directional vectors; and region  
20 selection. The vectors are processed to determine which region should next be highlighted. When a selection is made, the CPU sends, at step 650, a command to the video session manager to facilitate the transmission of a movie or applet.

25 At step 652, to facilitate a transition, the routine freezes the background video and prepares the set top terminal for the next applet or video transmission. In addition, the CPU executes a latency masking process as disclosed in commonly assigned United States patent  
30 application serial number 08/738,361 filed October 25, 1996. The applet ends at step 654.

Although many OSD graphics are sent within the VIDEOID  
7 stream through the forward information channel, some OSD graphics are transmitted to the set top terminal through the  
35 command channel. Specifically, so-called "list screen" data is sent through the command channel. This data contains a textual list of characters to be used in a menu and is transmitted in ASCII form at the beginning of an applet

transmission. The CPU converts the ASCII character list into OSD bitmap images and stores those images for subsequent use.

FIG. 7 depicts a flow diagram of a list information processing routine 700 for generating a list menu such as those depicted in FIG. 4, 9, 15 and 19. The routine is executed by the CPU upon requesting a list menu. The routine begins at step 702 and proceeds to step 704. At step 704, the CPU receives a list menu from the service provider. The menu applet contains an instruction for the CPU to display page 0 of list text that forms the menu. The list text an ASCII page of text. The page 0 request is processed at step 706. At step 708, the routine queries whether page 0 is available in the CPU cache. If the query is negatively answered, the CPU requests the page 0 text from the service provider and awaits its arrival. If page 0 is available in the cache, the CPU retrieves and uses the cached page to generate the text menu (at step 711). The CPU converts the ASCII text into one or more OSD bitmap images using an EEPROM based font and kerning table. The CPU stores the OSD bitmap in the CPU DRAM. As the OSD lists are displayed, the CPU moves the necessary OSD graphic images to the video decoder OSD memory. The list menu is in the form of that shown in FIG. 4.

Such display is performed on a paginated basis. At step 712, the CPU monitors the remote control for a new selection, e.g., up arrow, down arrow, and select a particular region. If a down arrow is selected, the routine proceeds to step 714. At step 714, the routine queries whether the display is presently showing the last page of the list menu. If the query is affirmatively answered, the routine returns to step 712. If the query at step 714 is negatively answered, the routine proceeds to step 716 to determine whether the next subsequent page is cached. If the page is not cached, the CPU requests, at step 718, the next page from the service provider. The new page is used to form and display a list menu at step 719. Similarly, if an up arrow is selected, the routine checks if the previous

page is in cache. If the page is in cache, the CPU uses the cached page. However, if the page is not available, the CPU requests the service provider to send the page.

If, at step 712, the routine detects that a region  
5 other than an up or down arrow is selected, the routine proceeds to step 722. At step 724, the routine processes the region selection in the same manner as described above for processing and displaying a new menu that is identified by the region selected. The routine ends at step 726.

10 The method and apparatus of the present invention provide an interactive menu structure (navigator) for an information distribution system such as a video-on-demand system. The navigator provides an enjoyable, interactive experience with full motion background video and active  
15 graphics that indicate when a selection is made by altering their appearance. All this functionality is brought to the set top terminal within an applet for each displayed menu. Consequently, the set top terminal does not require an expensive processor nor a large amount of memory. As such,  
20 the invention allows the set top terminal in an information distribution system to remain relatively inexpensive.

Although various embodiments which incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can  
25 readily devise many other varied embodiments that still incorporate these teachings.

What is claimed is:

1. An on-screen program guide for use in subscriber  
5 equipment in an interactive information distribution system,  
said on-screen program guide comprising:  
a graphics layer, for displaying one or more graphical  
objects, said graphical objects being associated with  
respective applets stored in provider equipment, said  
10 applets comprising menu information and associated image  
information;  
a video layer, for displaying still or moving images,  
including still or moving images generated using said applet  
image information; and  
15 a control layer, coupled to said graphics layer and  
said video layer, for generating an applet request in  
response to a selection of a graphical object.
2. The on-screen programming guide of claim 1, wherein  
20 additional graphical objects are generated using said applet  
menu information included within said executed applet.
3. The on-screen programming guide of claim 2, wherein  
said additional graphical objects are associated with  
25 respective applets stored in said provider equipment or said  
subscriber equipment.
4. The on-screen programming guide of claim 3, wherein  
said applets are linked together using said graphical  
30 objects to form an interactive menu structure for selecting  
information offerings available from said provider  
equipment.
5. The on-screen programming guide of claim 1, wherein:  
35 said graphics layer comprises a plurality of regions,  
each region having a respective graphic object; and  
said graphic objects are selected by selecting a region  
associated with a desired graphic object.

6. The on-screen programming guide of claim 5, wherein said graphic object has a first state until a selection is made, then said graphic object has a second state to emphasize or de-emphasize images within said video layer.

7. The on-screen programming guide of claim 6, wherein said first state and said second state of said graphic object have different opacity.

10

8. The on-screen programming guide of claim 1, wherein: one of said graphics layer and said video layer comprises a spatial mnemonic for imparting menu flow information indicative of a lateral menu structure and a previous menu structure, said menu flow information logically related to a preceding sequence of executed applets.

9. The on-screen programming guide of claim 1, wherein said control layer comprises:  
an input device, coupled to a controller, for selecting an object displayed in said graphics layer, thereby requesting said applet associated with said selected object;  
a transmitter, coupled to said controller, for transmitting to said information provider, via a back channel, a request for said selected applet;  
a receiver, coupled to said controller, for receiving from said information provider, via an information channel, an information stream including said requested applet; and  
a video signal generator, coupled to said controller, for generating display information for said graphics layer and said video layer.

10. Subscriber apparatus for use in interactive information distribution system, said interactive information distribution system comprising an information stream for receiving information from information provider equipment, and a back channel for transmitting information requests to



-31-

said information provider equipment, said subscriber apparatus comprising:

a receiver, coupled to a controller, for receiving said information stream;

5 a transmitter, coupled to said controller, for transmitting information requests to said information provider equipment; and

a video signal generator, coupled to said controller, for generating a video signal derived from information  
10 included in said information stream;

said input device selecting one of a plurality of graphical objects included in said video signal, said graphical objects being associated with respective applets stored in information provider equipment, said applets  
15 comprising menu information and associated image information; and

said controller, in response to said input device, causing an applet request to be transmitted to said information provider equipment, and in response to a  
20 reception of an information stream including said requested applet, executing said applet to produce graphical object information and video information for said video signal generator.

25 11. In an interactive information distribution system having service provider equipment coupled, through a communications network, to subscriber equipment containing at least a television, apparatus for providing navigation menus comprising:

30 means for transmitting, through said communications network, a menu applet as a portion of an information stream;

means, within said subscriber equipment and coupled to said communications network, for receiving said menu applet;  
35 and

processing means, coupled to said receiving means, for processing said menu applet to display an interactive menu within the subscriber equipment.

12. The apparatus of claim 11 wherein said menu applet comprises:

- a graphics portion;
- 5 an instruction portion; and
- a background video portion.

13. The apparatus of claim 12 wherein said processing means produces on-screen display graphics for said menu from said  
10 graphics portion, produces applet instructions for controlling said menu operation from said instruction portion; and produces background video for said menu from said background portion.

14. The apparatus of claim 11 wherein said receiving means further comprises a demodulator for demodulating said information stream containing said applet.

15. The apparatus of claim 11 wherein said processing means  
20 comprises:

- a video decoder; and
- a central processing unit.

16. A subscriber-side method for retrieving information in  
25 an interactive information distribution system comprising, said method comprising the steps of:

- (a) selecting, using an input device, one of a plurality of displayed graphical objects;
- (b) transmitting to an information provider, via a back  
30 channel of a communications network, a request for an applet associated with said selected graphical object;
- (c) receiving from said information provider, via an information channel of said communications network, said requested applet;
- 35 (d) executing said received applet to produce a navigation menu comprising graphical objects associated with other applets, said navigation menu superimposed over a

video image, said video image produced using information included in said executed applet; and

(e) repeating steps (a) through (d) until a desired result is achieved.

5

17. A method for generating an interactive menu comprising the steps of:

receiving a transmission of a menu applet containing instructions, graphics and background video;

10 extracting said instructions from said applet;

storing said instructions;

extracting said graphics from said applet;

storing said graphics;

decoding said background video using said decoder; and

15 displaying a menu having said background video with said graphics overlaid thereupon and operating said menu in accordance with said instructions.

18. The method of claim 17 wherein said displaying step  
20 further comprises the steps of:

overlaying a certain portion of said background video with said graphics;

changing a state of the graphics from a first state to a second state to emphasize or de-emphasize said certain  
25 portion of said background video.

19. The method of claim 18 wherein said first state has a different opacity than said second state of said graphics.

30 20. The method of claim 17 wherein said displaying step further comprises the steps of:

covering a certain portion of said background video with a transparent graphic within said graphics; and

changing a state of the graphics from opaque to  
35 transparent to highlight said certain portion of said background video.

21. An applet for defining menus within a menu structure of an interactive information distribution system comprising:

5 a descriptor file comprising a region descriptor that defines objects that reside in a particular region of a menu, a function descriptor for defining operations that occur when a particular object is selected, and a message descriptor for defining the particular message that is sent through the interactive information distribution system when a particular object is selected.

10

22. The applet of claim 21 wherein said objects comprise one or more of the following: graphical bitmaps, audio objects, or animation objects.

15 23. The applet of claim 22 wherein said function descriptor comprises a plurality of descriptors for defining a color and transparency level of the color for a particular graphical bitmap.

20 24. A method for generating an interactive menu comprising the steps of:

displaying a menu having background video and a graphical object overlaid upon a certain portion of said background video;

25 changing a state of the graphical object from a first state to a second state to emphasize or de-emphasize said certain portion of said background video.

30 25. The method of claim 24 wherein said first state has a different opacity than said second state of said graphical object.

26. The method of claim 24 wherein said first state is transparent and said second state is opaque.

35

27. The method of claim 24 wherein said first state is opaque and said second state is transparent.

1/20

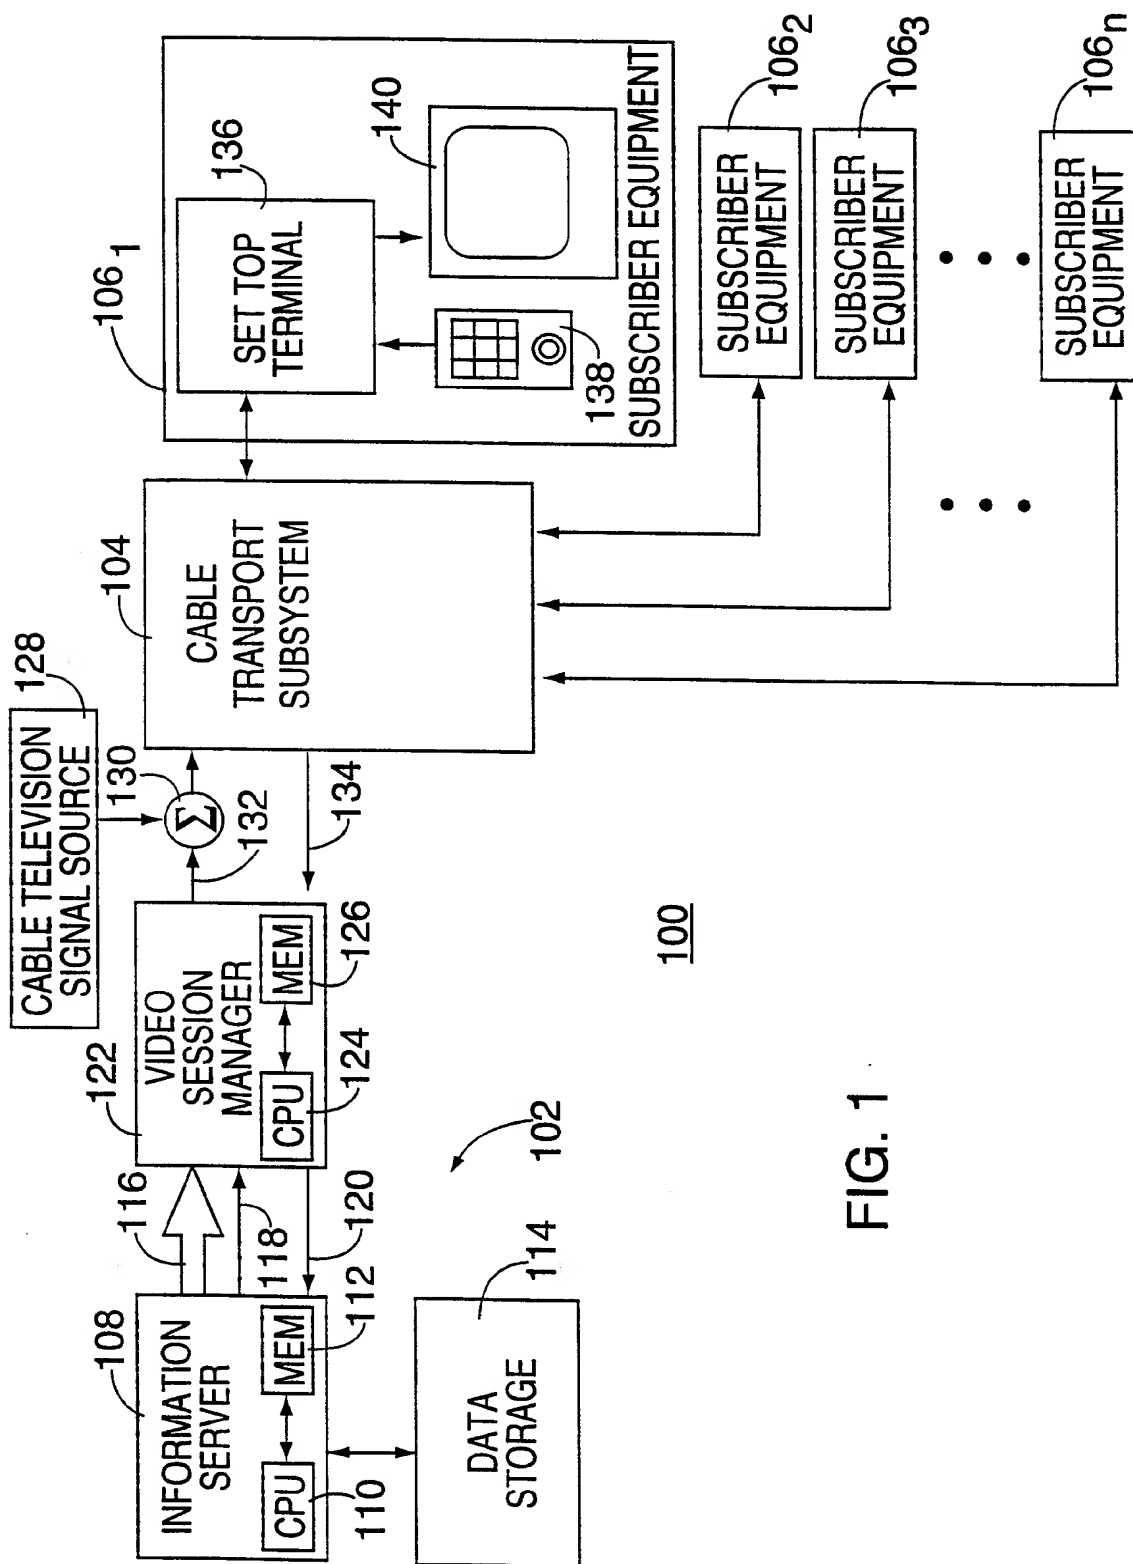


FIG. 1

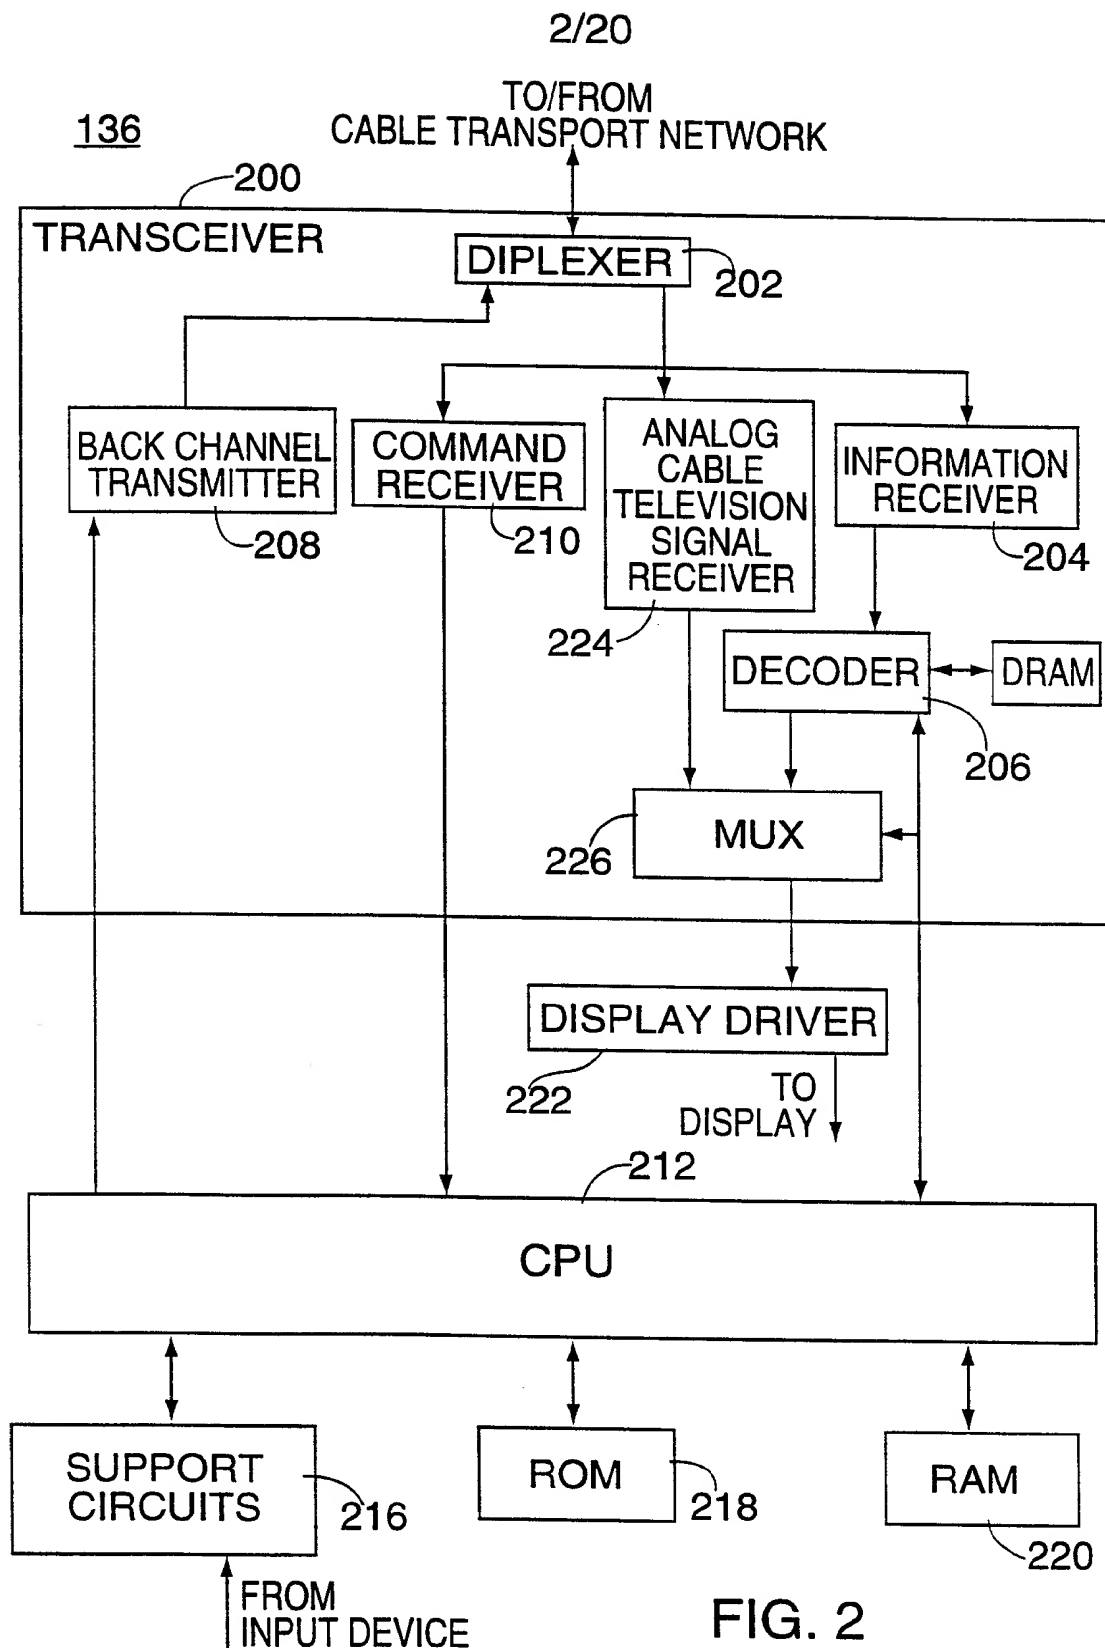


FIG. 2

3/20

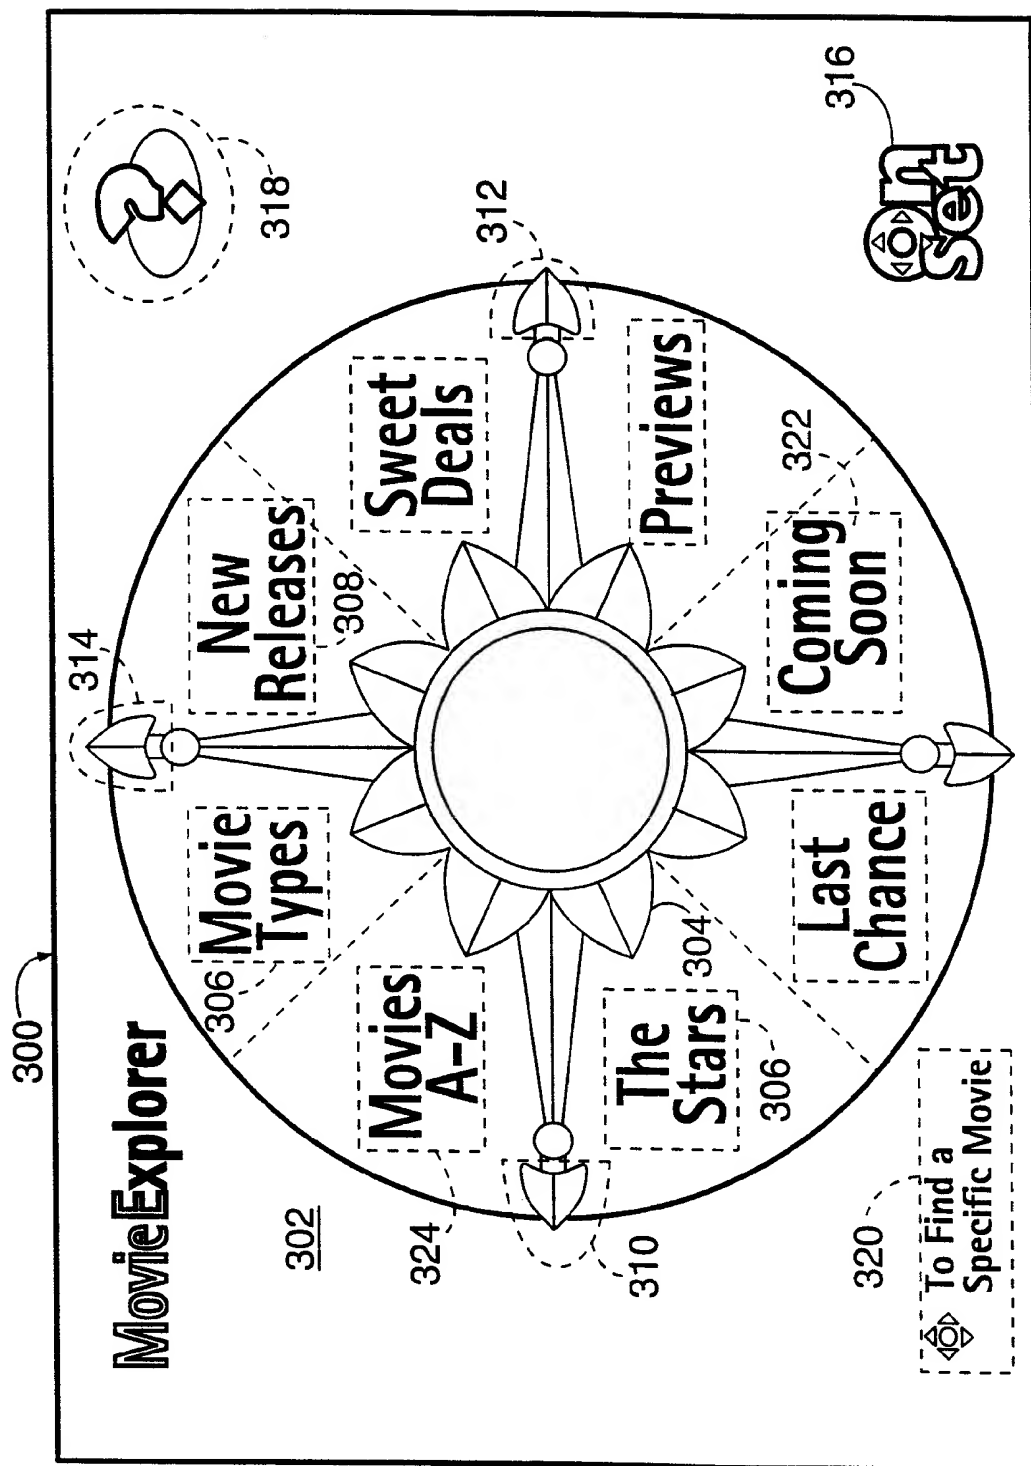


FIG. 3

4/20

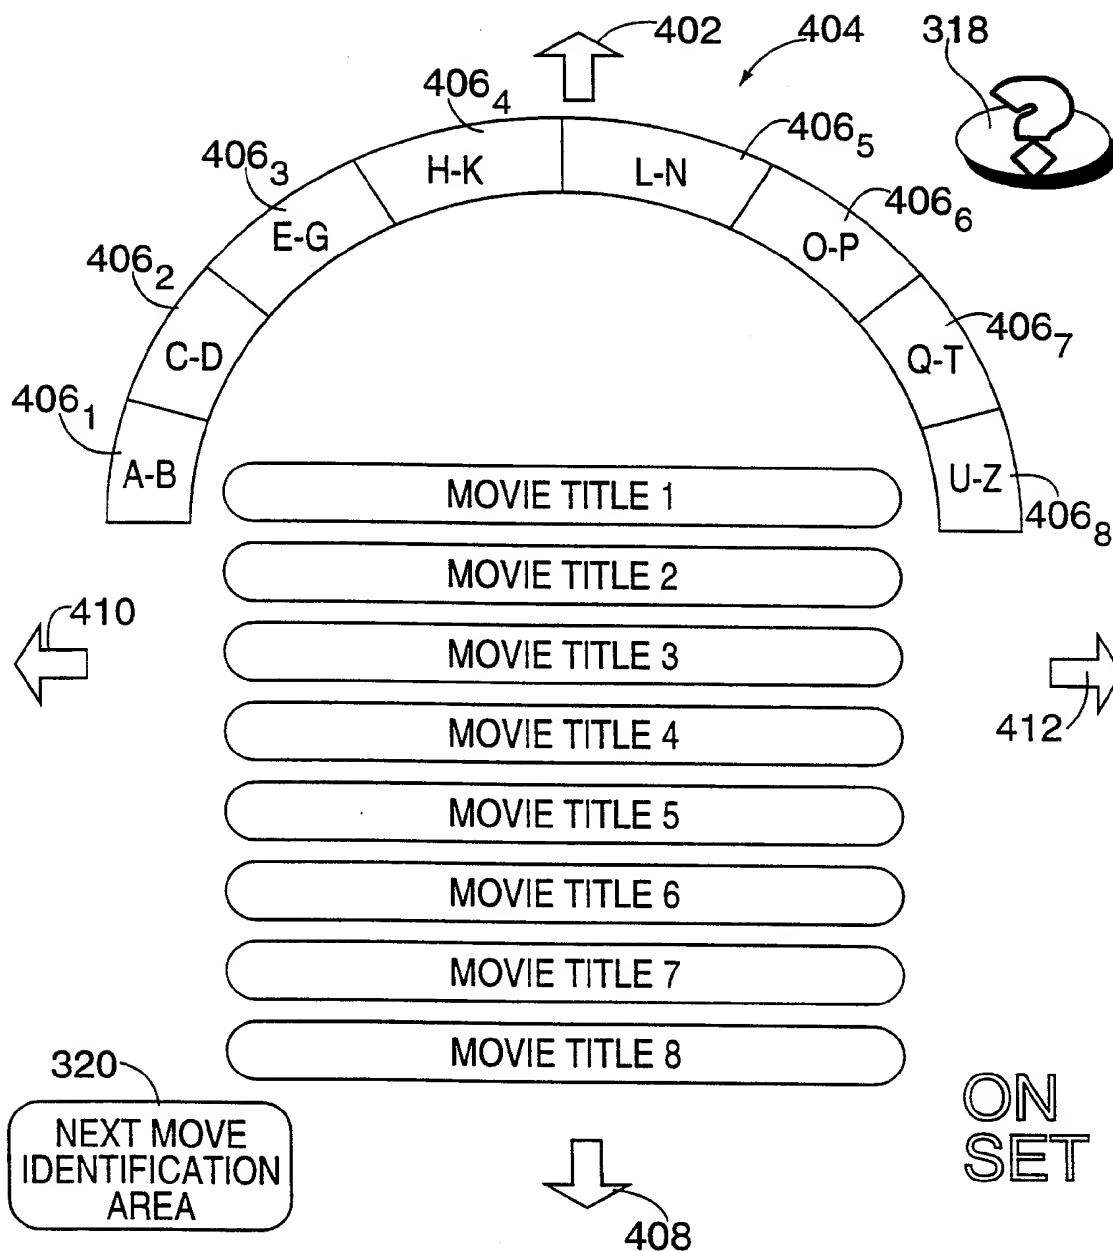


FIG. 4



5/20



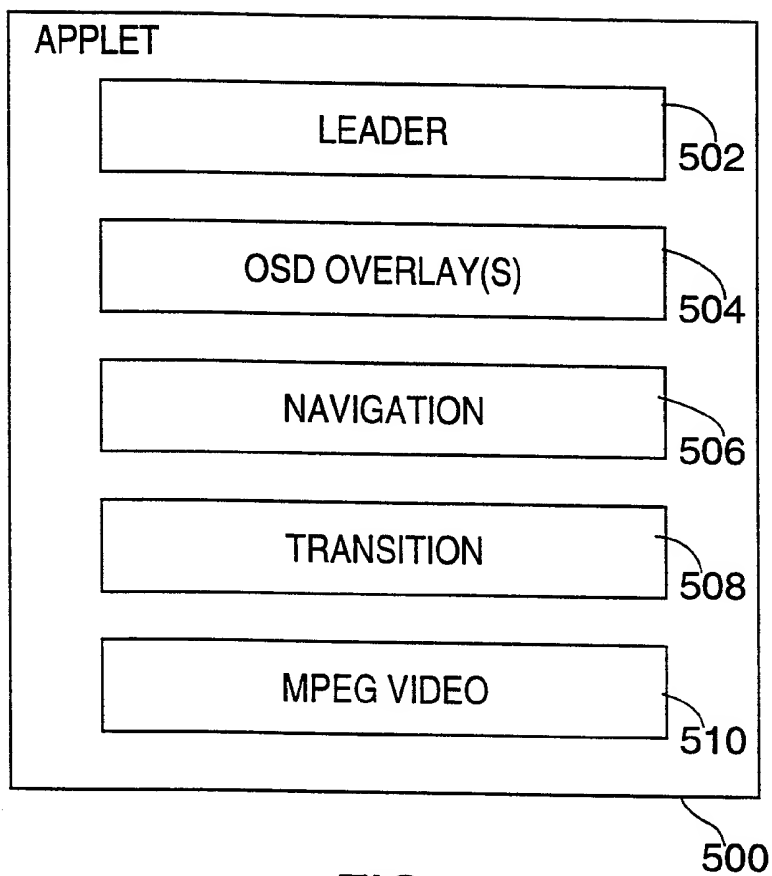


FIG. 5

6/20

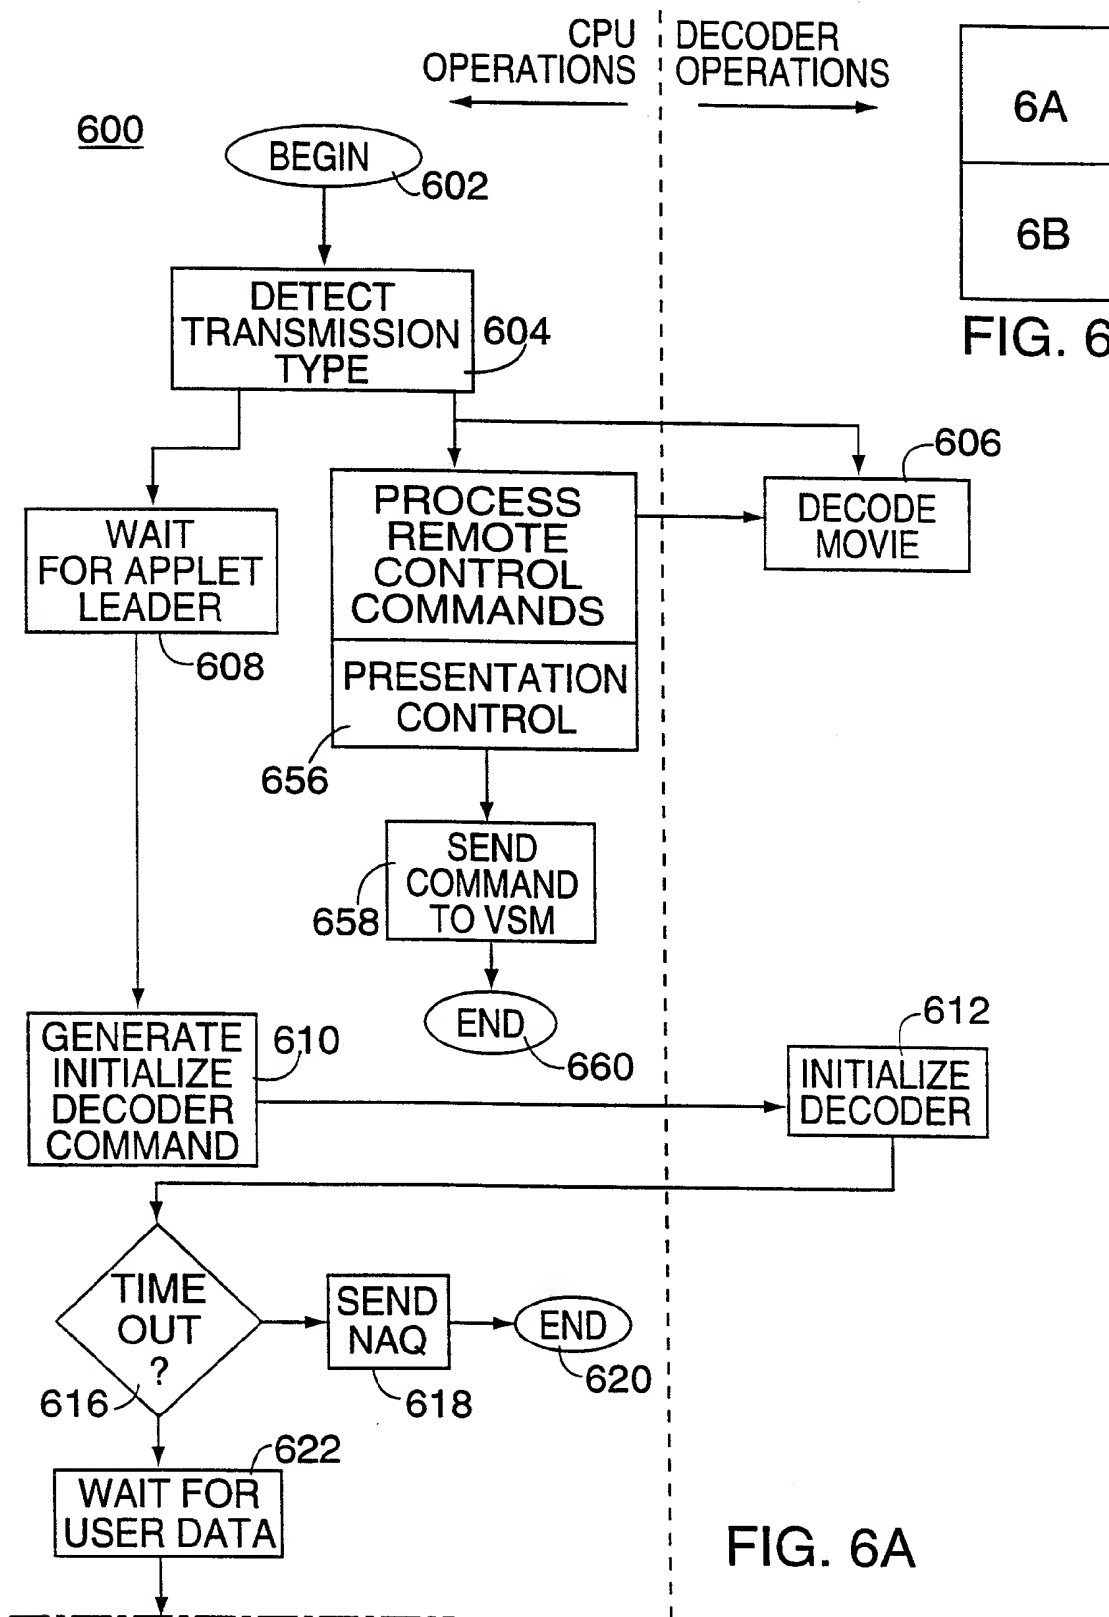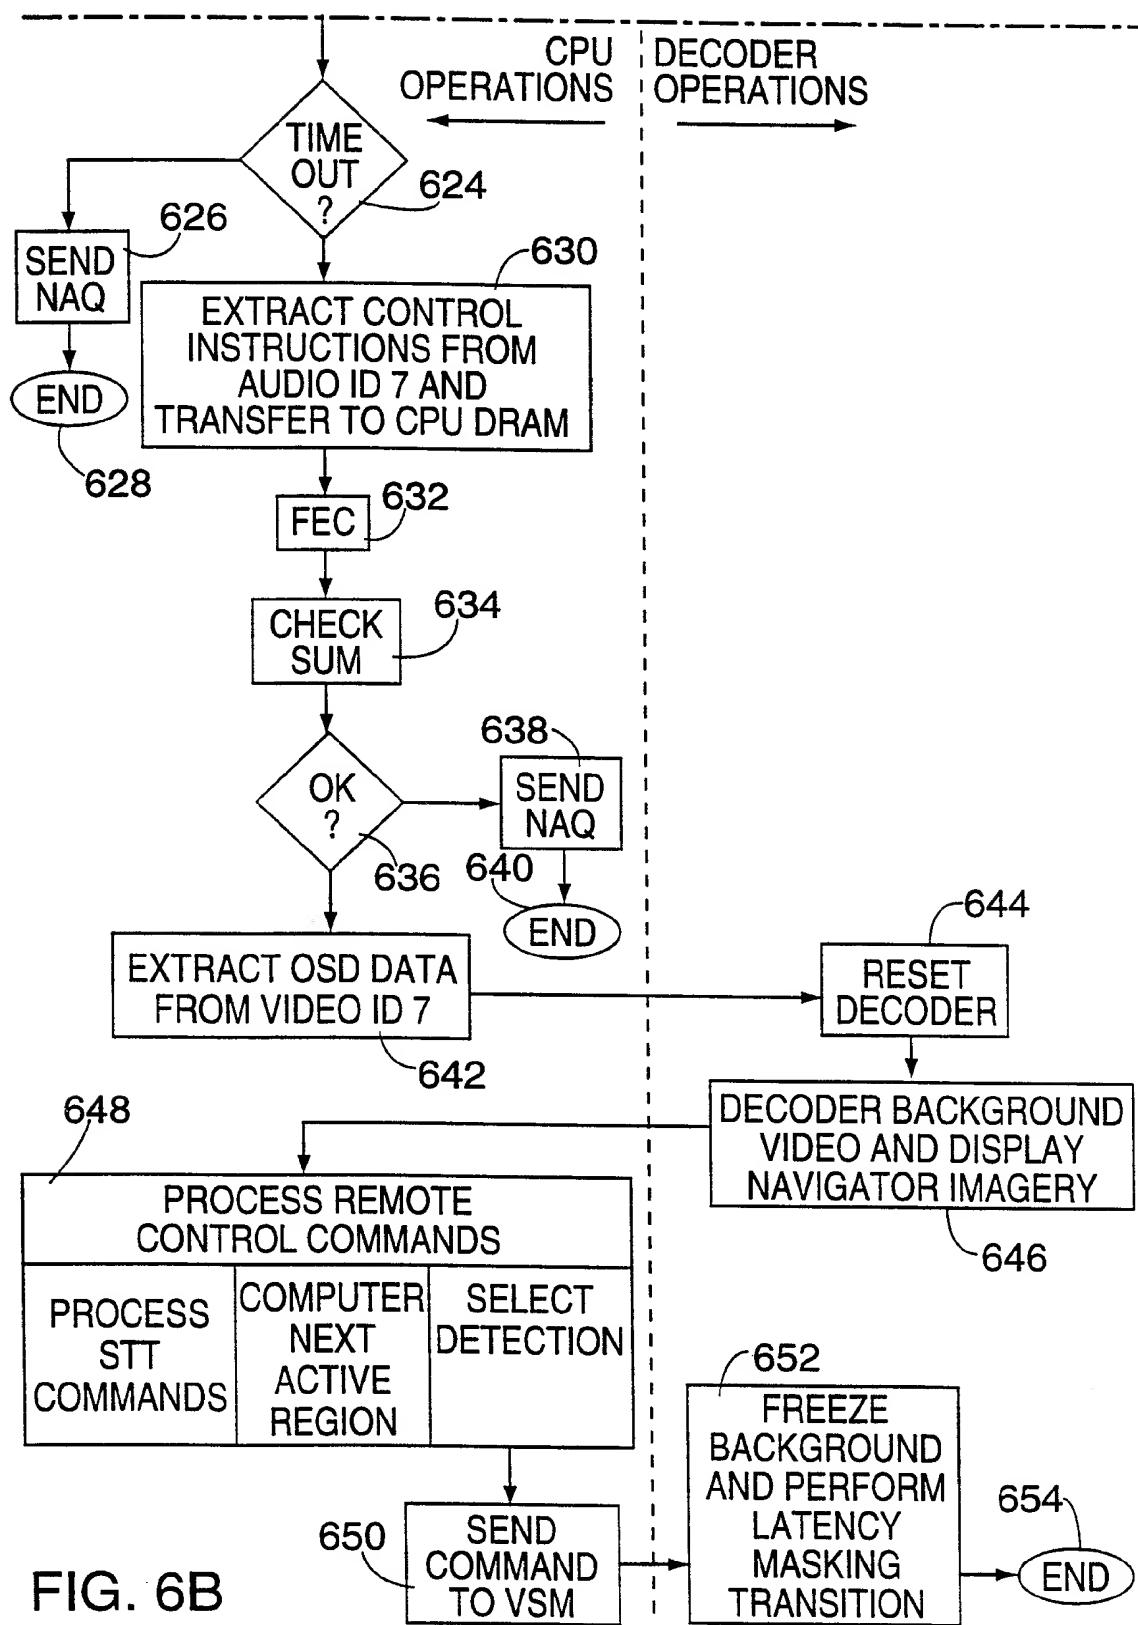

7/20



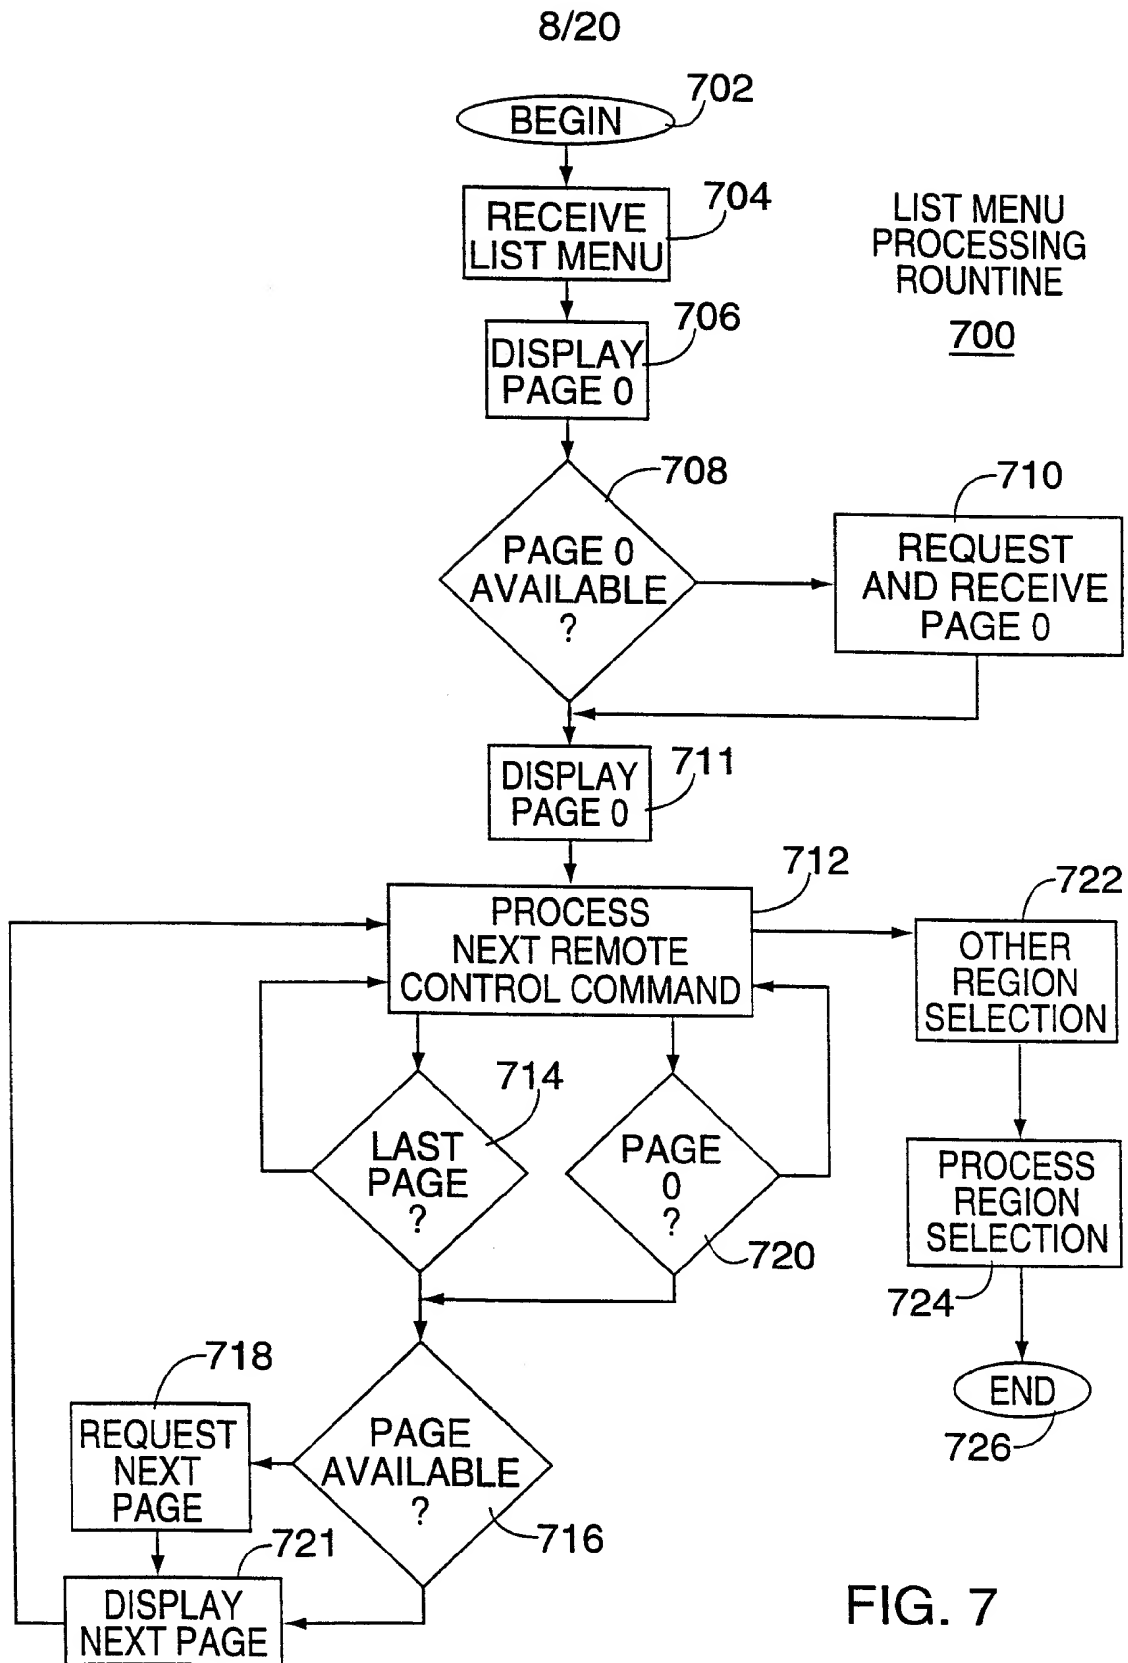


FIG. 7

9/20

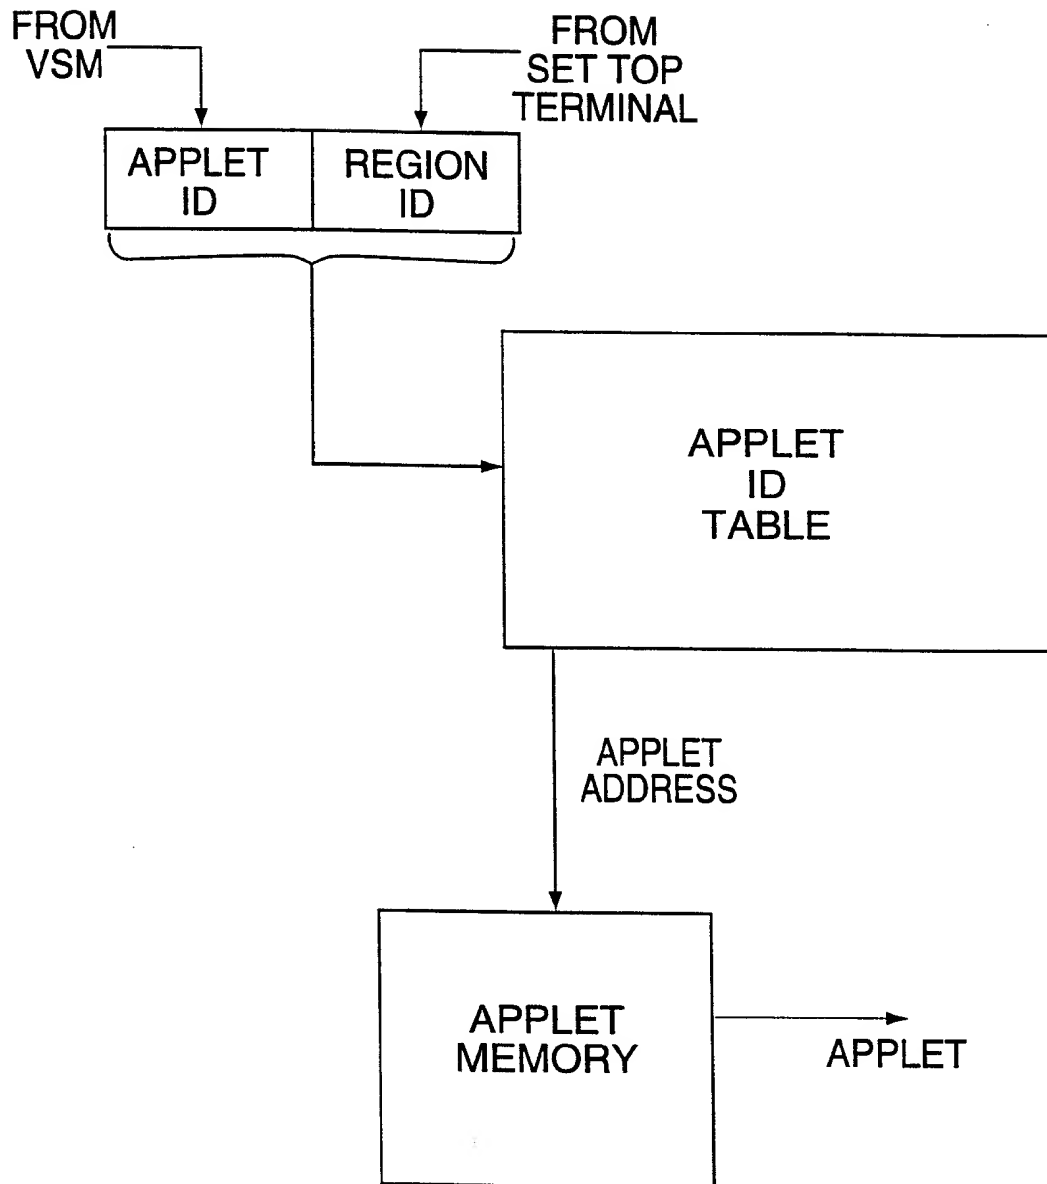


FIG. 8

10/20

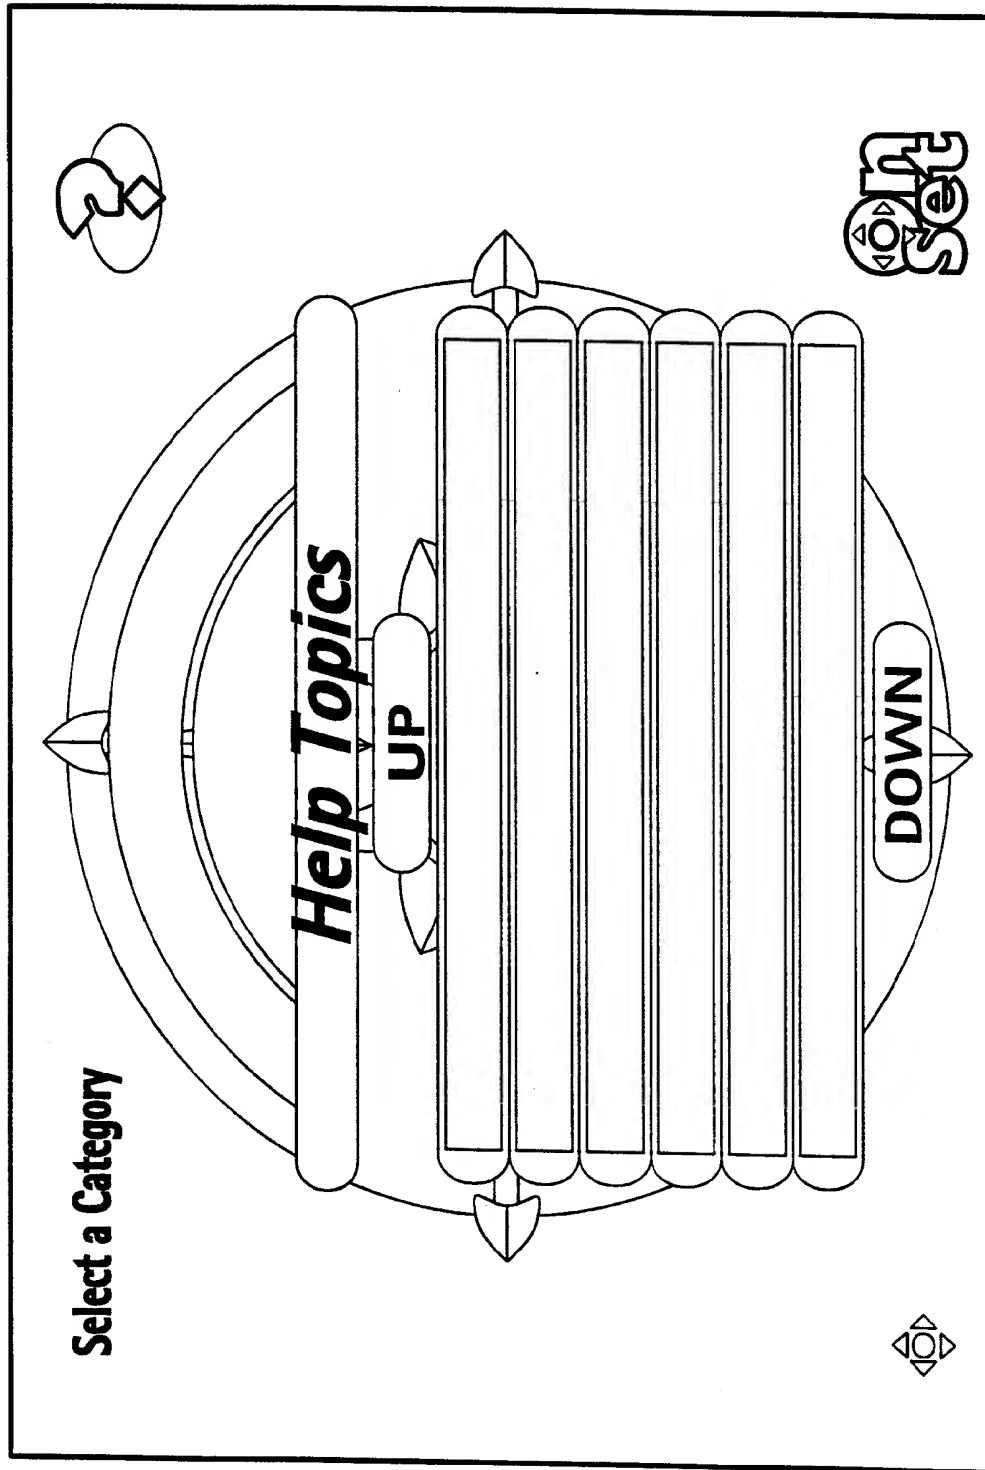


FIG. 9

11/20

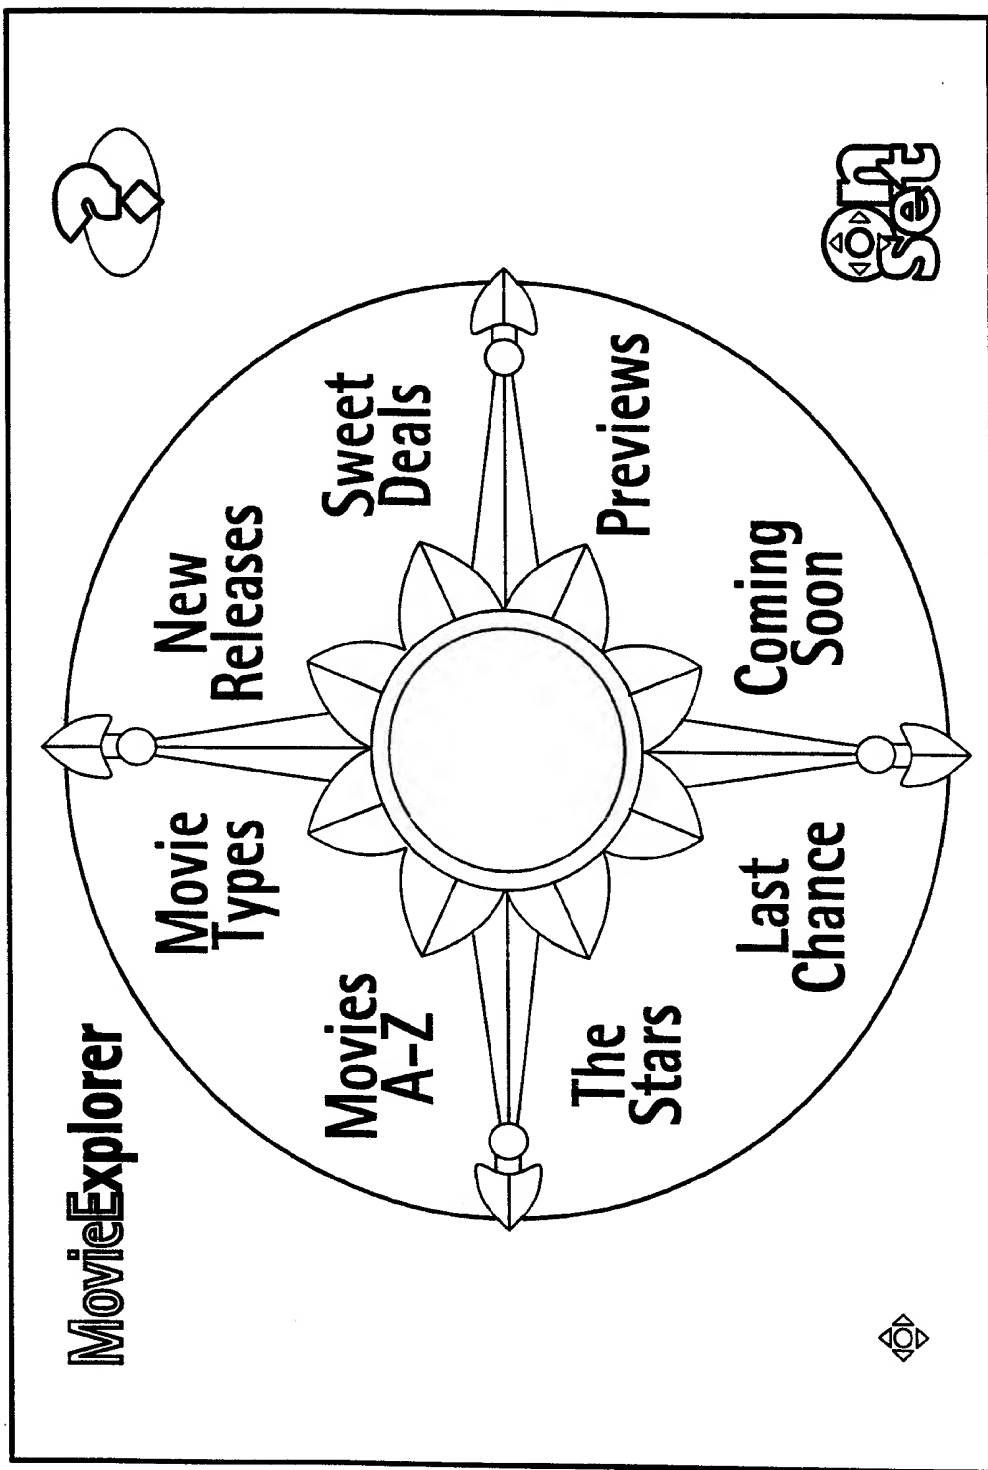


FIG. 10

12/20

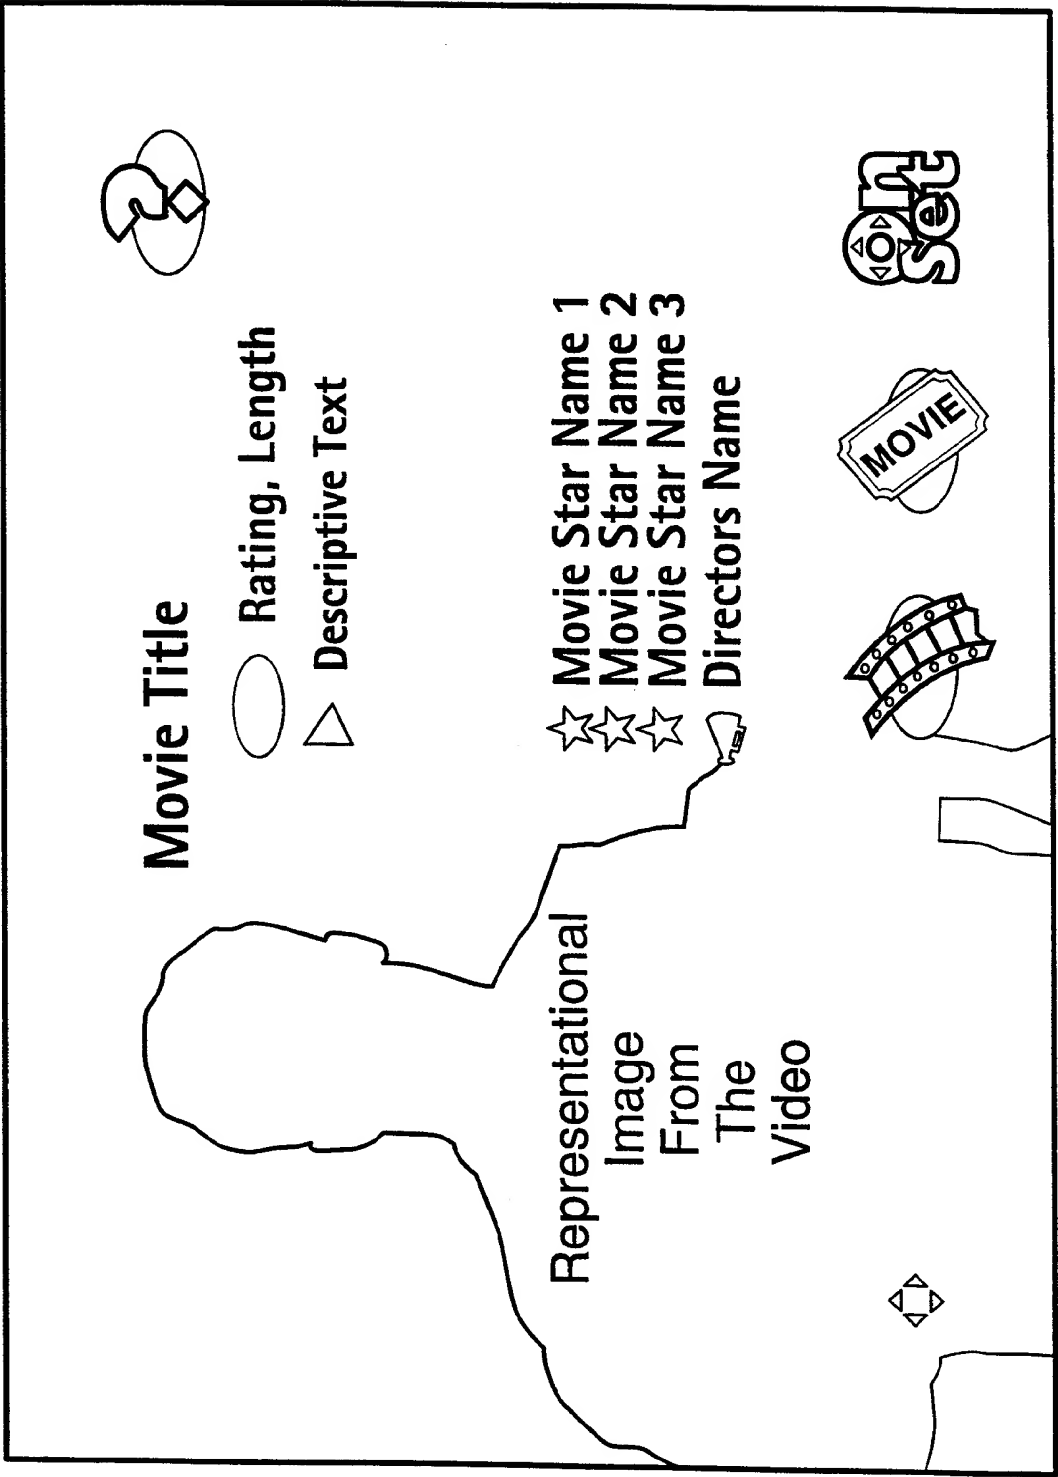


FIG. 11



13/20

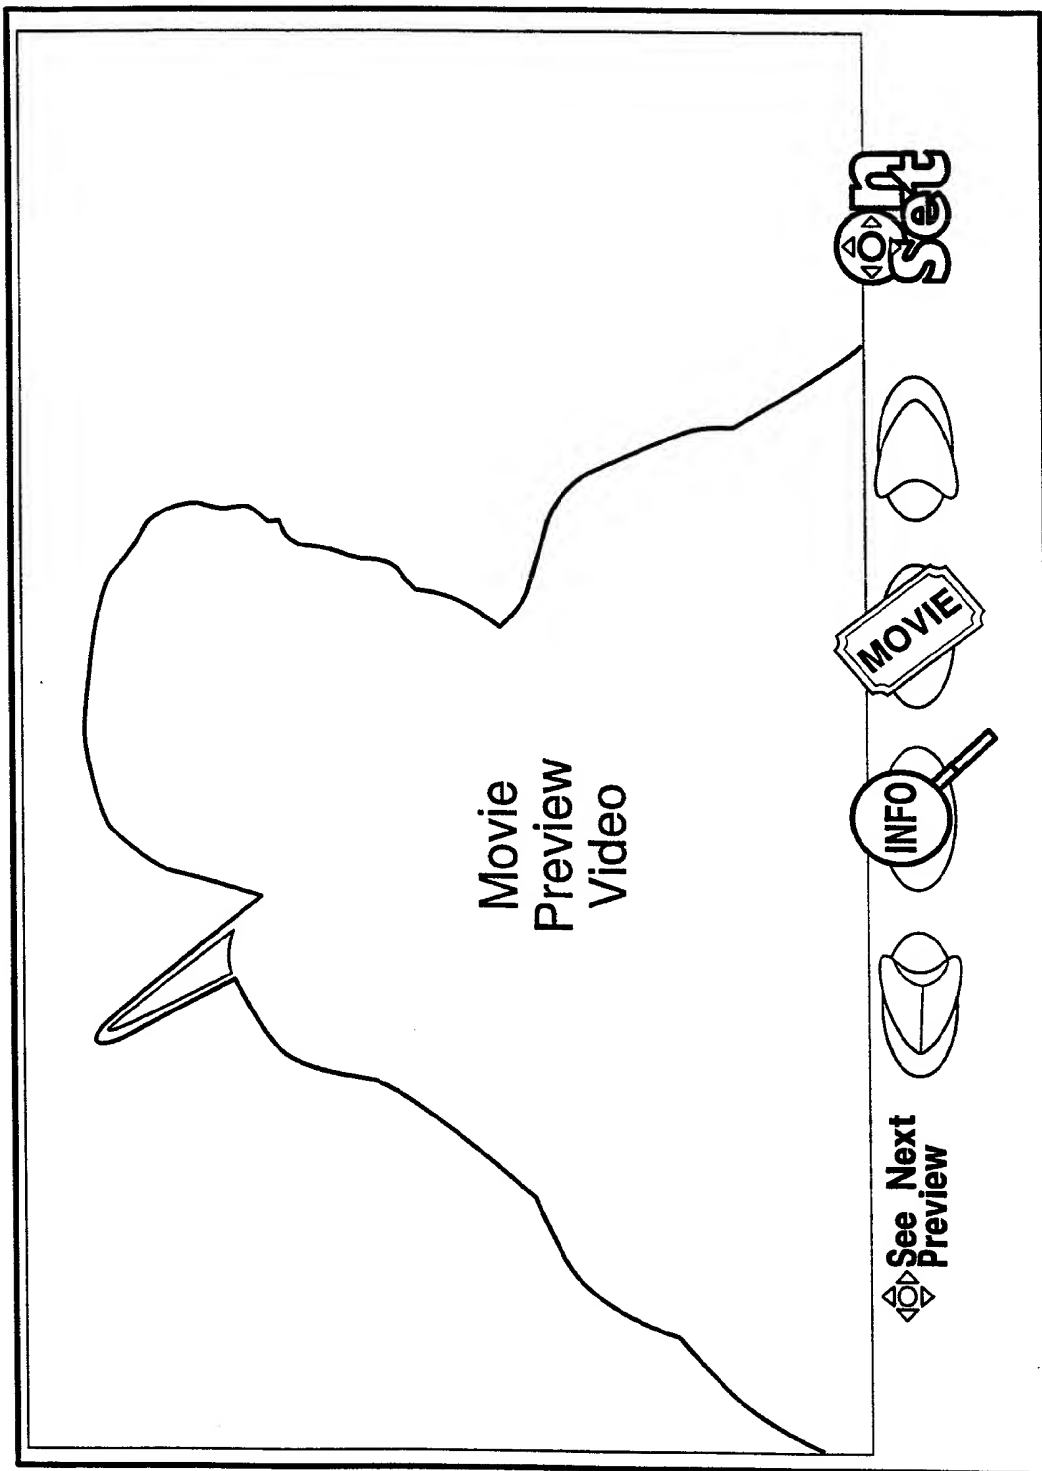


FIG. 11

14/20

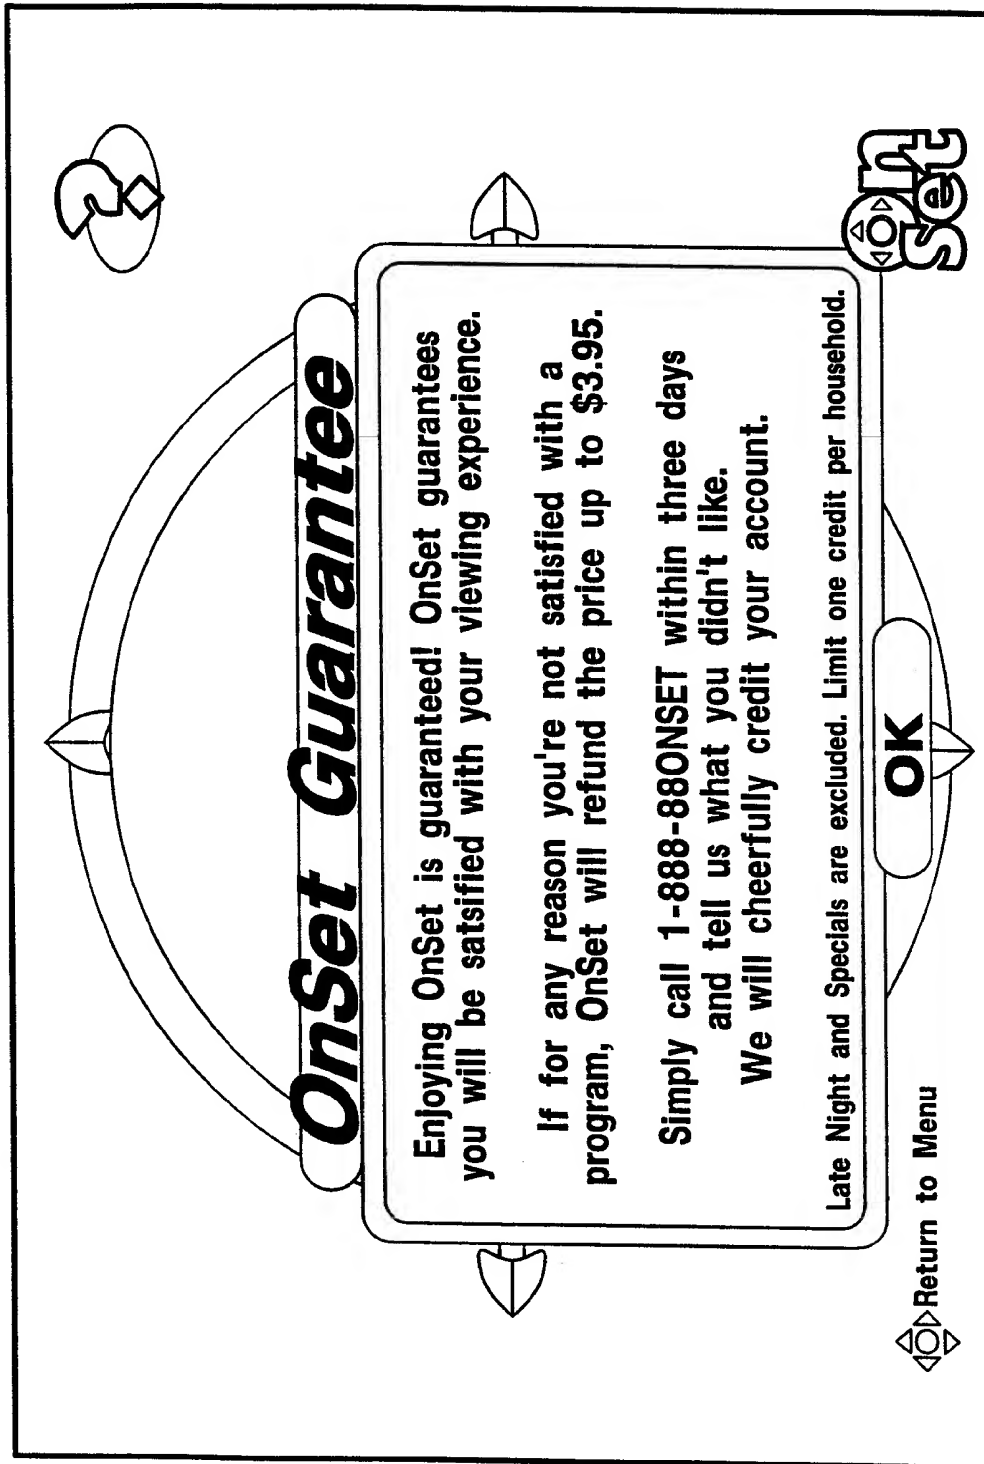



FIG. 13

VO: Text of Guarantee except for caveats



15/20



# *OnSet Set Up*

---

**LONG-NAMED FAMILY'S ACCOUNT**

---

**1. Rating Limit:**

Left or Right  
 ▼ **NONE** ▲

**2. Spending Limit:**


▼ **\$100** ▲

---


**3. PIN Number:**


Enter Numbers

1 1 1 1



**SAVE**





No Restrictions

FIG. 14

VO: It's easy to set ratings and spending limits. Highlight a limit and move the OnSet Button left or right to change it. To set or reset the PIN Number, just enter four digits from the remote control. Select "Save" when you're done, or press "Return" to

16/20

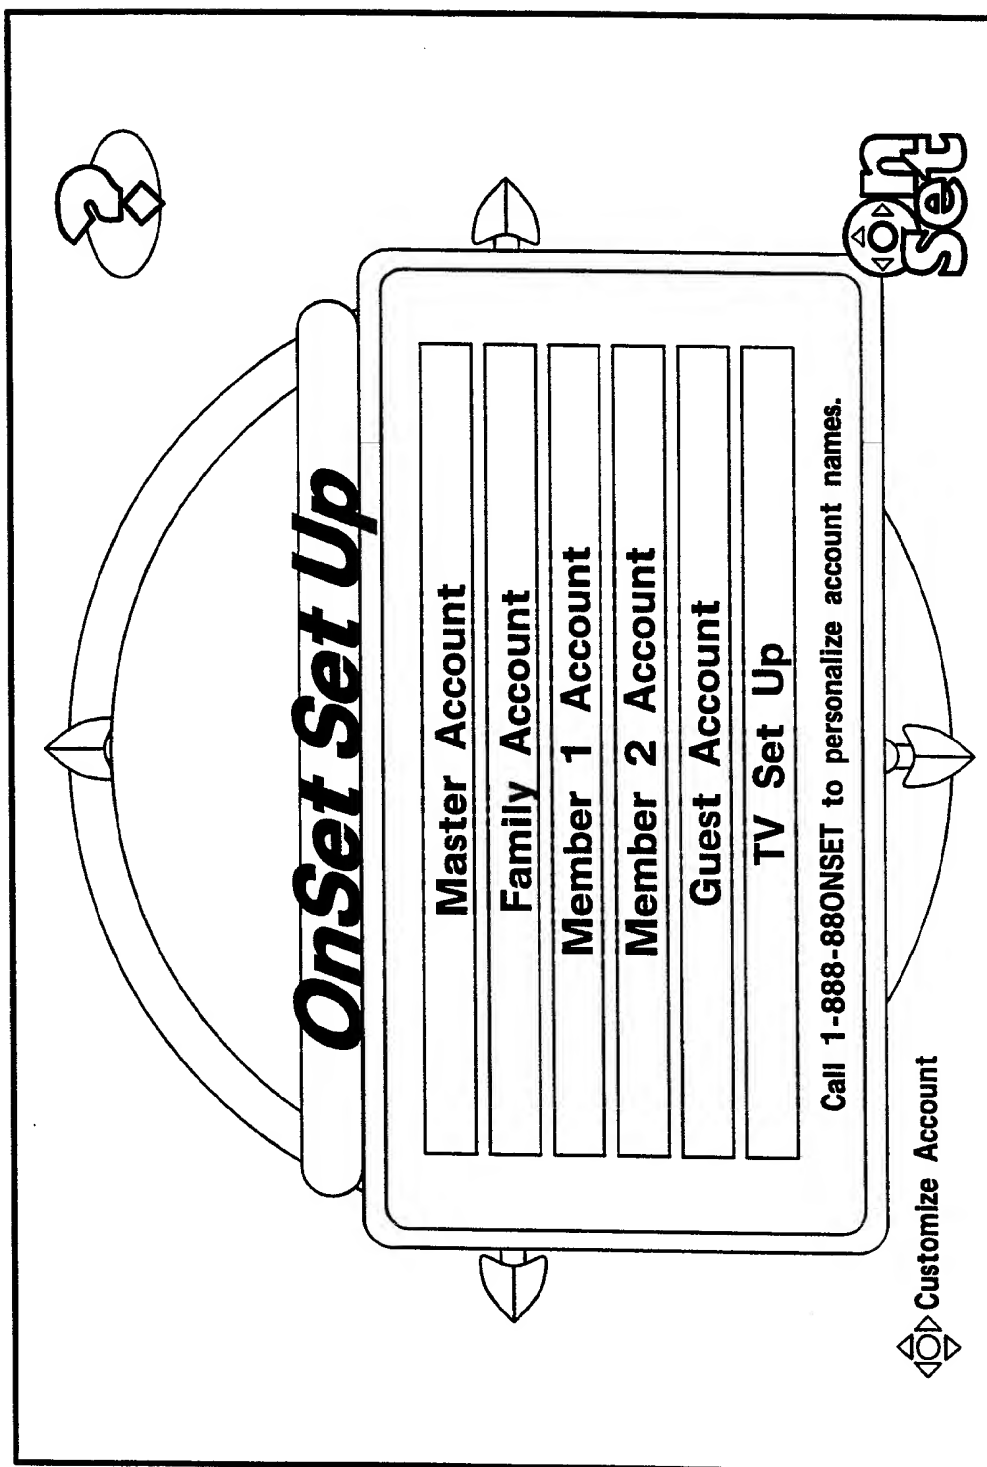


FIG. 15

VO: You can set up accounts to control spending and ratings limits for the members of your family. You can also set up this TV to require PIN numbers to use OnSet.



17/20

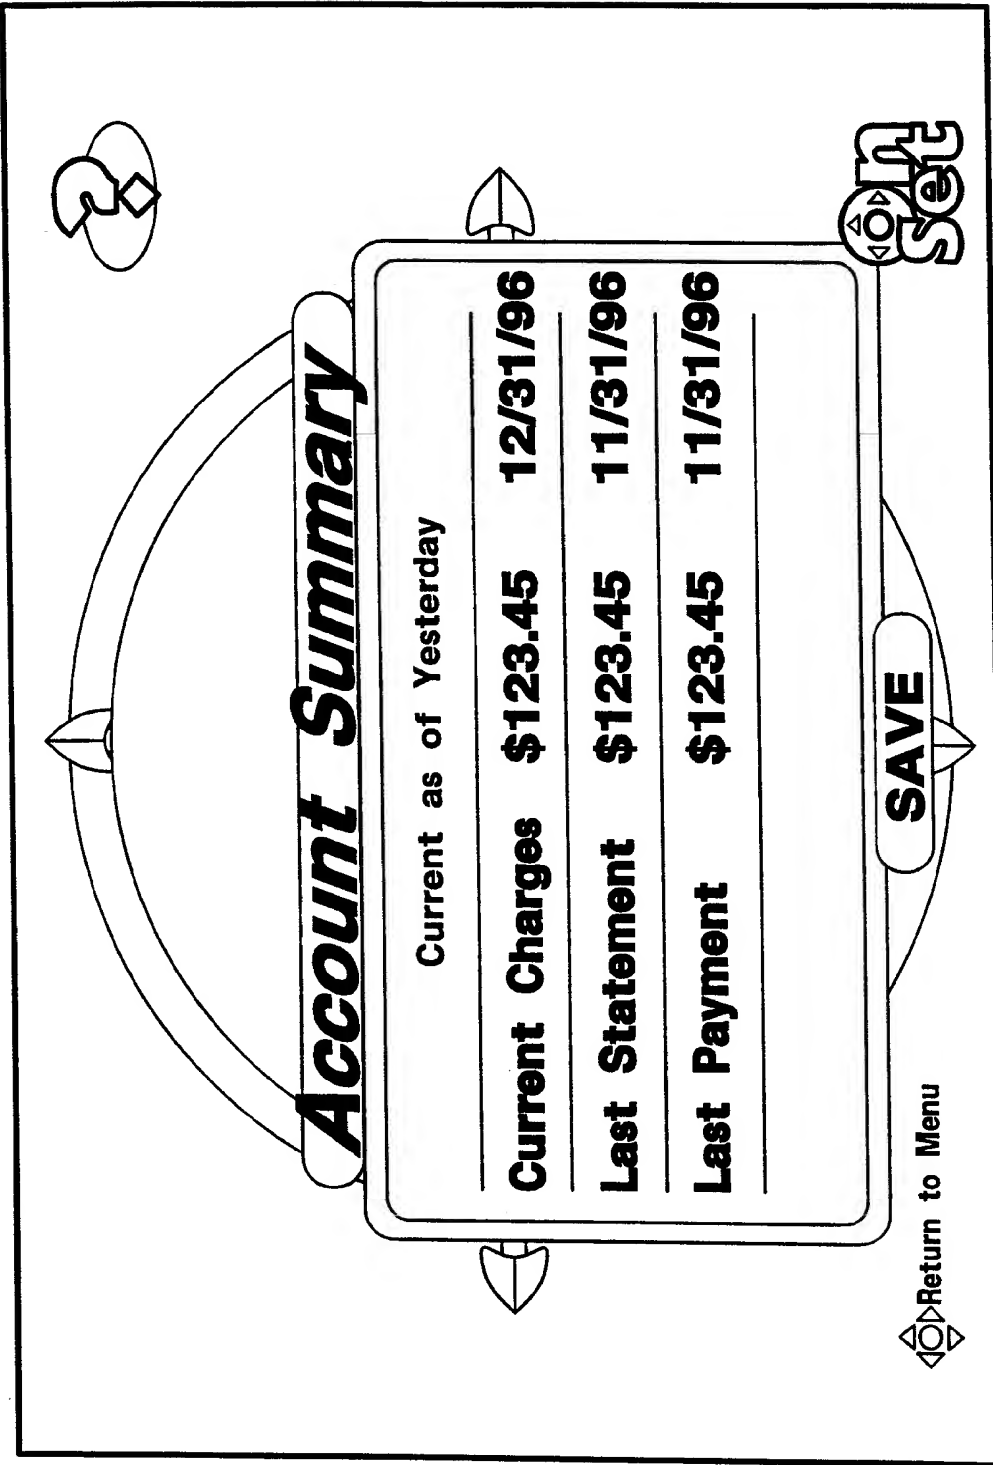
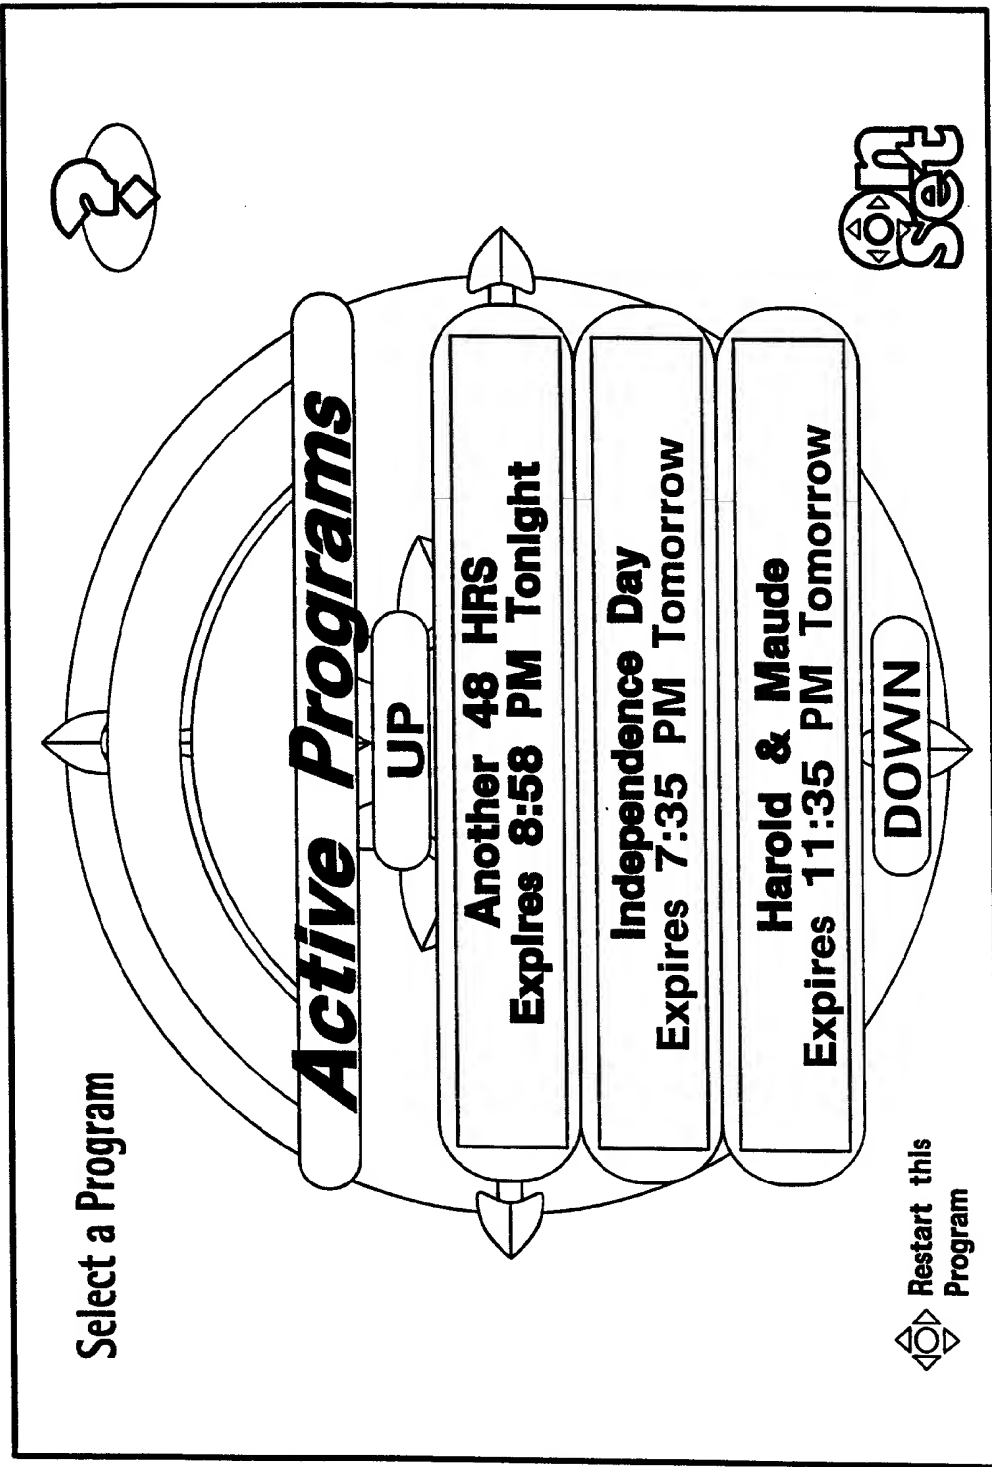


FIG. 16

VO: Here is an up-to-date summary of your OnSet Account as of yesterday, including payments received and programs ordered. If you have additional questions, please call us at 1-888-88ONSET.

18/20



**FIG. 17**

VO: This screen lets you decide whether to require a PIN Number to use OnSet on this TV. Move Left or Right to change settings. When you're ready, select "Save".

19/20

**TV Set Up**

**1** Require PIN Number to use OnSet on this TV? ☐ **NO** ☐ Left or Right

**2** If No, which account's ratings and spending limits apply to this TV? ☐ **LONG-NAMED FAMILY'S ACCOUNT** ☐

☐ No Restrictions ☐ **SAVE**

**OnSet**



VO: This screen lets you decide whether to require a PIN Number to use OnSet on this TV. Move Left or Right to change settings. When you're ready, select "Save".

FIG. 18

20/20

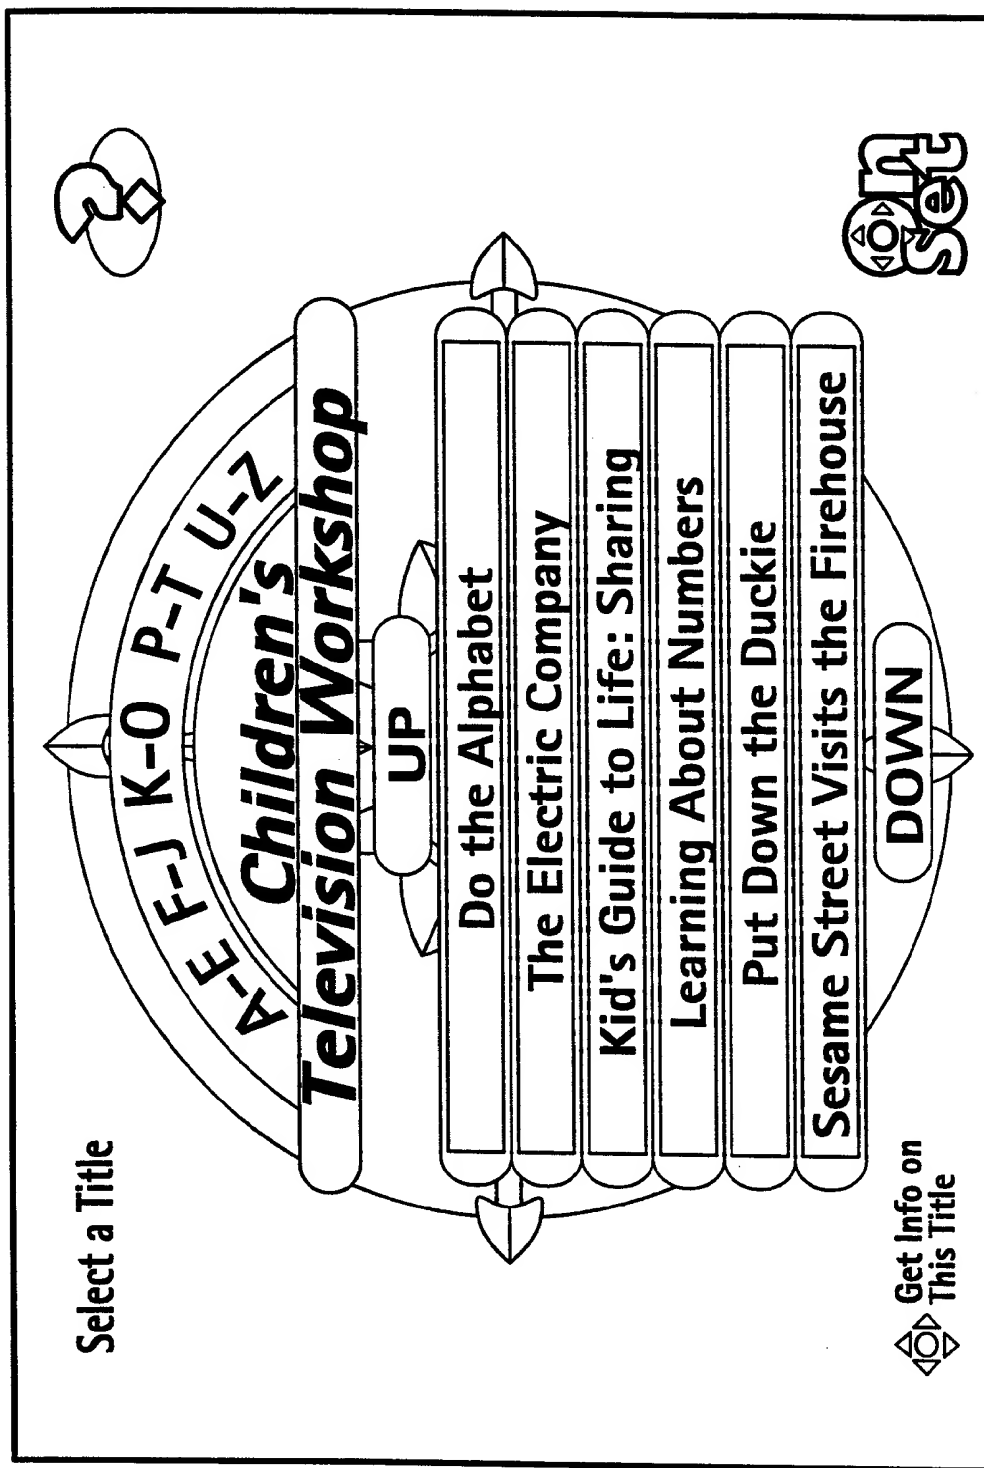


FIG. 19






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04N 5/50, 5/445, 7/10, 7/14</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 98/31116</b>
		<b>(43) International Publication Date:</b> 16 July 1998 (16.07.98)
<b>(21) International Application Number:</b> PCT/US97/22850		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
<b>(22) International Filing Date:</b> 4 December 1997 (04.12.97)		
<b>(30) Priority Data:</b> 60/034,490 13 January 1997 (13.01.97) US 08/984,427 3 December 1997 (03.12.97) US		
<b>(71) Applicant:</b> DIVA SYSTEMS CORPORATION [US/US]; Building 203, 333 Ravenswood Avenue, Menlo Park, CA 94025 (US).		
<b>(72) Inventors:</b> GORDON, Donald; 216 Locust Street, Pacific Grove, CA 93950 (US). GOODE, Christopher; 722 Creek Drive, Menlo Park, CA 94025 (US). THOMAS, Philip, A.; 1410 Cedarmeadow Court, San Jose, CA 95131 (US). CONOVER, Mark, D.; 10721 Wunderlich Drive, Cupertino, CA 95014 (US). COLE, Brooks; 65 Third Street, Point Reyes Station, CA 94956 (US).		
<b>(74) Agent:</b> TONG, Kin-Wah; Thomason & Moser, 2-40 Bridge Avenue, P.O. Box 8160, Red Bank, NJ 07701 (US).		<b>Published</b> <i>With international search report.</i>
		<b>(88) Date of publication of the international search report:</b> 22 October 1998 (22.10.98)

**(54) Title:** METHOD AND APPARATUS FOR PROVIDING A MENU STRUCTURE FOR AN INTERACTIVE INFORMATION DISTRIBUTION SYSTEM

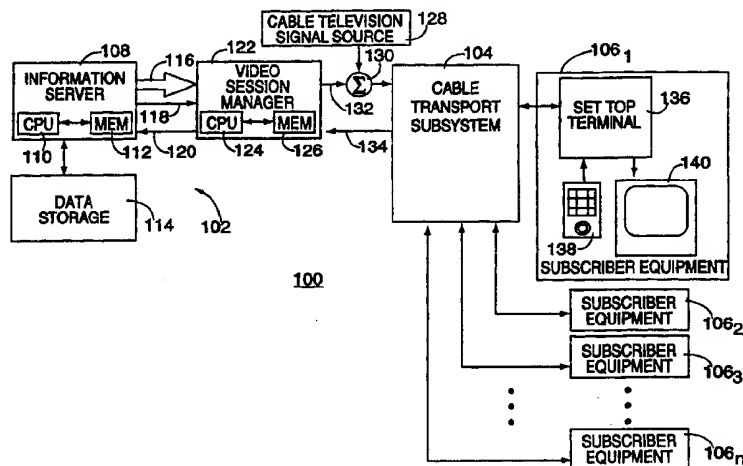**(57) Abstract**

A method and apparatus for providing an interactive menu structure within an interactive information distribution system (100). The menu structure is embodied in a combination of software, which provides a so-called navigator and a set top terminal (136) that provides certain functionality for the set top terminal. The menu structure has each menu (e.g., menu instructions, graphics and video) contained in downloadable applets (300) which are sent upon request from the service provider equipment (108) to the set top terminal for display. As such, the navigator functions are actually distributed between the service provider equipment and the subscriber's equipment (106). Such distribution provides an enjoyable, real-time interactive session that allows the user to rapidly navigate through a plethora of menus to find particular information which they desire to view.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<b>AL</b>	Albania	<b>ES</b>	Spain	<b>LS</b>	Lesotho	<b>SI</b>	Slovenia
<b>AM</b>	Armenia	<b>FI</b>	Finland	<b>LT</b>	Lithuania	<b>SK</b>	Slovakia
<b>AT</b>	Austria	<b>FR</b>	France	<b>LU</b>	Luxembourg	<b>SN</b>	Senegal
<b>AU</b>	Australia	<b>GA</b>	Gabon	<b>LV</b>	Latvia	<b>SZ</b>	Swaziland
<b>AZ</b>	Azerbaijan	<b>GB</b>	United Kingdom	<b>MC</b>	Monaco	<b>TD</b>	Chad
<b>BA</b>	Bosnia and Herzegovina	<b>GE</b>	Georgia	<b>MD</b>	Republic of Moldova	<b>TG</b>	Togo
<b>BB</b>	Barbados	<b>GH</b>	Ghana	<b>MG</b>	Madagascar	<b>TJ</b>	Tajikistan
<b>BE</b>	Belgium	<b>GN</b>	Guinea	<b>MK</b>	The former Yugoslav Republic of Macedonia	<b>TM</b>	Turkmenistan
<b>BF</b>	Burkina Faso	<b>GR</b>	Greece			<b>TR</b>	Turkey
<b>BG</b>	Bulgaria	<b>HU</b>	Hungary	<b>ML</b>	Mali	<b>TT</b>	Trinidad and Tobago
<b>BJ</b>	Benin	<b>IE</b>	Ireland	<b>MN</b>	Mongolia	<b>UA</b>	Ukraine
<b>BR</b>	Brazil	<b>IL</b>	Israel	<b>MR</b>	Mauritania	<b>UG</b>	Uganda
<b>BY</b>	Belarus	<b>IS</b>	Iceland	<b>MW</b>	Malawi	<b>US</b>	United States of America
<b>CA</b>	Canada	<b>IT</b>	Italy	<b>MX</b>	Mexico	<b>UZ</b>	Uzbekistan
<b>CF</b>	Central African Republic	<b>JP</b>	Japan	<b>NE</b>	Niger	<b>VN</b>	Viet Nam
<b>CG</b>	Congo	<b>KE</b>	Kenya	<b>NL</b>	Netherlands	<b>YU</b>	Yugoslavia
<b>CH</b>	Switzerland	<b>KG</b>	Kyrgyzstan	<b>NO</b>	Norway	<b>ZW</b>	Zimbabwe
<b>CI</b>	Côte d'Ivoire	<b>KP</b>	Democratic People's Republic of Korea	<b>NZ</b>	New Zealand		
<b>CM</b>	Cameroon			<b>PL</b>	Poland		
<b>CN</b>	China	<b>KR</b>	Republic of Korea	<b>PT</b>	Portugal		
<b>CU</b>	Cuba	<b>KZ</b>	Kazakstan	<b>RO</b>	Romania		
<b>CZ</b>	Czech Republic	<b>LC</b>	Saint Lucia	<b>RU</b>	Russian Federation		
<b>DE</b>	Germany	<b>LI</b>	Liechtenstein	<b>SD</b>	Sudan		
<b>DK</b>	Denmark	<b>LK</b>	Sri Lanka	<b>SE</b>	Sweden		
<b>EE</b>	Estonia	<b>LR</b>	Liberia	<b>SG</b>	Singapore		

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/22850

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : H04N 5/50, 5/445, 7/10, 7/14.

US CL : 348/569, 563, 12, 13.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/569, 563, 12, 13, 564, 589, 600

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,585,866 A (MILLER ET AL.) 17 DECEMBER 1996, COL. 7, LINE 45, TO COL. 36, LINE 58.	1-27
X, P	US 5,594,509 A (FLORIN ET AL.) 14 JANUARY 1997, COL. 7, LINE 60, TO COL. 25, LINE 25.	1-27



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"B" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"A" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

21 APRIL 1998

Date of mailing of the international search report

28 JUL 1998

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MICHAEL LEE

Telephone No. (703) 305-4743